

HYOSUNG GENERATOR

High Speed Generator
Medium Speed Generator
Control Panel
Motor-Generator Set
Wind Generation System



Global Top Energy, Machinery & Plant Solution Provider



About HYOSUNG



Hyosung Power & Industrial Systems PG is a division under Hyosung which consists of seven performance groups(PGs). In addition to establishing itself as a world-class manufacturer of electrical equipments, green technology and industrial machineries, Hyosung is also the largest producer of tire cords and spandex in the global market and the second largest supplier of ATMs in the USA.

01 Our Business

Brief introduction of Hyosung Power & Industrial Systems

Hyosung Power & Industrial Systems Performance Group

Hyosung Power & Industrial Systems Performance Group(PG), a comprehensive energy solution provider, boasts world-leading technology in the global power industry and has secured a competitive capability on par with that of top competitors in transformers, switchgears, motors, generators, gear units, industrial machineries, industrial pumps, and wind energy business.

With globalization as one of our top priorities, we have achieved outstanding increase in sales over the past few years thanks to the enhancement in Hyosung's quality, technology, and brand recognition among overseas clients, which include North America, Europe, the Middle East, and Asia. We expect such robust performance, marked by an increasing number of orders from the overseas market, to continue in the future.

At the heart of our capability to grow as a comprehensive energy solution provider is our global organization structure. Hyosung Power & Industrial Systems PG is divided into four business areas or performance units(PU), depending on the types of flagship products : Power Systems PU, Industrial Machinery PU, HYOSUNG GOODSPRINGS PU, and the Wind Energy Business Division.



Industrial Machinery Performance Unit

The Industrial Machinery Performance Unit Plays an important role in the infrastructure industry around the globe and is specialized in manufacturing all types of motors, gear reducers, generators, green energy, and industrial machines.

With the ability to produce motors with up to 25,000kW, we possess an automated production line capable of manufacturing more than 40,000 motors every month.

Our accumulated technologies and various experiences have made it possible to develop turnkey-based engineering projects including industrial plant, energy solutions, and alternative refueling systems.

In addition, we anticipate that our efforts in innovation among rotary machinery will make significant contributions towards creating energy profitability as well as greater efficiency. With the goal to serve as a world-leading provider of industrial machinery and plant engineering, we will continue to focus on innovative energy conservation technology, enhanced reliability of new products, and development of new technologies.



HYOSUNG GENERATOR

CONTENTS

02 Our Business 03 Sustainability / R&D 04 HYOSUNG Generator

06 High Speed Generator Set(MTU Engine, CUMMINS Engine, CATERPILLAR Engine, MITSUBISHI Engine, DOOSAN Engine, PERKINS Engine)

15 Medium Speed Generator Set(General Data Sheet, Outline Dimension Drawing) 23 Control Panel 26 Motor-Generator Set 28 Wind Turbine Generator

02 Sustainability

Our sustainability principles are the backbone of the way we design and manufacture products

Quality Assurance

Hyosung strives for excellence. We believe excellence can only be achieved through absolute quality and value for customers. In order to create quality products, we believe that all of the actions of every single employee must be focused in the highest level of quality. In order to achieve such levels, we have implemented a quality assurance policy and programs that make our philosophy into a reality. Our Quality Assurance Policy was founded based on the management policy of the president and meets the demands of ISO 9001. As a globally active company, we are committed to comprehensive and quality management through three quality strategies: quality management system, customer-focused management system, and concentration on core competencies. The comprehensive quality management system ensures that we completely comply with all compliances and applicable legislation, codes, and standards in addition to implementing efficient operation of our management resources to eliminate unnecessary waste. Our customer-focused management system clarifies and simplifies our first priority which is customer satisfaction. All of our work is aimed to exceed customer needs and provide exceptional value through quality standards, flexibility, and innovation. Finally, we concentrate on our core competencies for strict quality control and continual improvement which provides quality products and cost-saving to our clients via advancement in technical capacity and technological innovation. We implement our policy via a Quality Management Team manages research laboratories, including the Measurement Standard Laboratory, the Chemical Analysis Laboratory and the Material Analysis Laboratory to maintain a strict control over quality.



Quality Management System




Customer-focused Management System



Concentration on Core Competencies

Environment Protection Policy

Hyosung understands the impact of Hyosung's activities in the environment and works to protect the environment from pollution, manages the environmental impacts of Hyosung's products and technologies, and prevents future pollution and harmful effects in the environment by investing in environmentally-friendly products and solutions. Based on this eco-philosophy of shared responsibility, Hyosung has implemented a comprehensive environmental protection program that aims to minimize our impact on the environment and conserve resources. Our environmental policy fulfils all requirements of the ISO 14001.



03 R&D

Inspiring innovation, creation and expertise

Hyosung R&D Center identifies innovation, creation, and expertise as core value, and concentrates on world class R&D activities in the 21st century with a philosophy aspiring after customer satisfaction, quality priority, and performance orientation. Hyosung pursues to be the world's best company in the field of heavy electrical machinery, industrial & electrical electronics engineering, and energy system. Ever since establishment in 1978, R&D Center had led the development of domestic technology. Along with the Anyang and Changwon labs, the group has endeavored to produce core technology and world-class products in the areas of heavy electrical machinery, energy system, electrical electronics engineering, and industrial automation system.

Research Areas

Hyosung R&D Center engages in the activities in the field of energy system, solution & service, applied electrical and electronic technology, basic core technology, technology of improved reliability, core components, and new materials.

Energy System

- Renewable energy (wind system, wind turbine, wind PCS, solar system, PV PCS, fuel cell, co-generation)
- Electric Vehicle (EV charger, EV motor)

Solution & Service

- Power facility diagnosis algorithm and system
- Power facility lifecycle evaluation system
- Service solution for remote diagnosis for prevention

Applied Electrical & Electronic Technology

- Power conversion system
- Flexible AC transmission system and high voltage direct current
- Power quality solution

Basic Core Technology

- Fortified technology in structural dynamics, electromagnetics, heat transfer analysis, etc.
- Skills for system simulation, analysis and evaluation
- Business support technology

Technology with Improved Reliability


- Test data analysis and testing facility
- Analysis of lifecycle and cause of error
- Reliability assessment (environment-friendliness, durability, long-term degradation, and more)

Core Components and New Materials

- Organic and inorganic insulation materials
- Silicon forming technology
- Intelligent sensor (facility diagnosis, CT, PT, VT, LA, and more)

HYOSUNG Generator


Optimizing Generator through Analysis Program

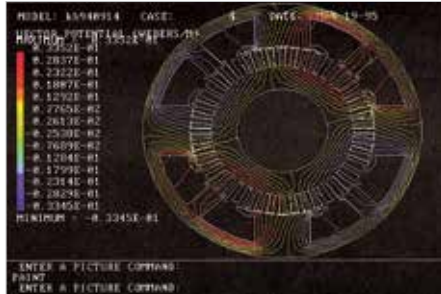


Magnetic Flux Vector Potential in core



Magnetic Flux Density in core

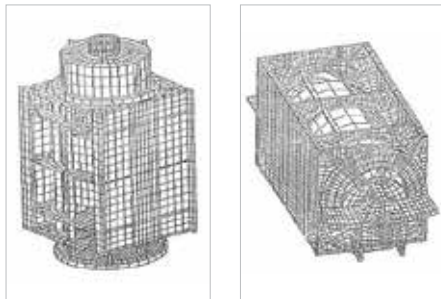

Stress Analysis by ANSYS

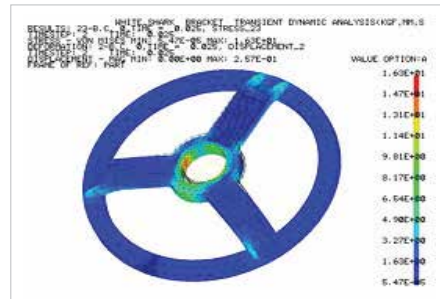

Stress Analysis in bracket by NASTRAN

We have improved reliability by designing generator in 3D(AUTO CAD) and structural analysis program manufacturing suitable products in condition of field.

As applying Thyristor Control and Brushless exciter system, it is more improved for solidity, maintenance and stable voltage without fluctuation of load than the brush exciter system. First of domestic, with developing PMG exciter system, we are proud of top class quality.

Products

High Speed Diesel Generator

- 4 pole, 20 ~ 3,300kW


Medium Speed Diesel Generator

- 6 ~ 14 pole, 300 ~ 20,000kW

ETC.

- MG Set (AC, DC)
- Gas Turbine Generator
- Gas Engine Generator
- Co-generation Power Station
- Specialty Products

- ① Diesel generator set for emergency power
- ② Diesel generator set for continuous power
- ③ Motor-Generator Set
- ④ Control Panel



Characteristic

PMG type makes superior transient response characteristic (declining the drop of electric pressure rates, improvement in recovery time of voltage) on initially started to machines

PMG type, under short-circuit condition, is capable of withstanding the mechanical stresses induced by a short-circuit current of at least three times the full load current

PMG type supplies stable voltage as isolated out of the disturbance like noise and makes fine wave form because of protection against distortion

Special Features



Compact

To get compact by designing each part in structure and electric analysis program



Stable Voltage Occurrence

To get stable voltage by using AVR with Thyristor



Convenient Operation

To supply convenient operation by designing to system with auto and manual at the same in condition of field



Complete Vibration Isolation Device

To get complete vibration isolation by using isolator



Complete Device Protecting against Noise

To reduce noise by using industrial, residential and critical silencer



Simple Maintenance

To supply easy maintenance with simple and strong organization by adopting the brushless type



Auto Spreading M/C



Auto Taping M/C




Manual Taping



Uniform Shape by Spreading M/C



Coil Insulated with MICA Tape

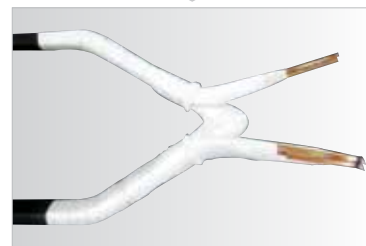

End Section of Coil Taped Manually

PMG (Permanent Magnetic Generator) System


In modern society, as changed electric consumption pattern, it is being more rising requirement on high quality source of power. With accumulated technical expertise and experience for a long time, Hyosung developed PMG type in the first of country and is applying it to the standard item.

In case of usual self-excitation system, it did not guarantee stability of voltage because of irregular input voltage to AVR when machines are initially started.

Whereas, permanent magnet excitation system, by providing self-generating voltage from itself to AVR, is capable of supplying absolutely stable voltage to load.



Features of PMG system generator

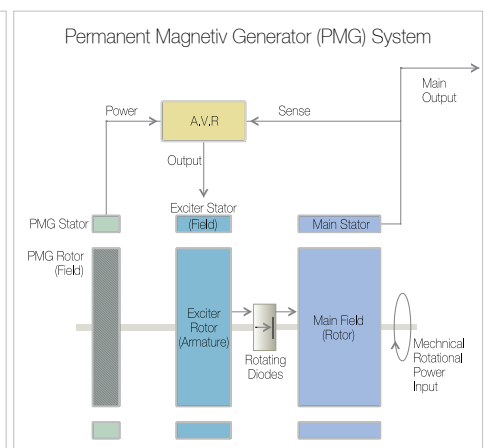

Schematic diagram (PMG)

High Speed Generator Set



Characteristic

High speed diesel generator sets apply to various worldwide engine brand according to customer's requirement. It ensures protection against noise, isolation vibration and feeds suitable source of power as supplying stable voltage.

Application



High speed diesel generator sets of Hyosung apply main, emergency power source of Industrial facilities that is factories, buildings, apartment and power plants.

It supplies suitable source of power as fitly composed to characteristic of each Industrial facilities.

HIGH SPEED GENERATOR

MTU Engine (HGMT Series 560 ~ 3300 kW)

Outline Drawing

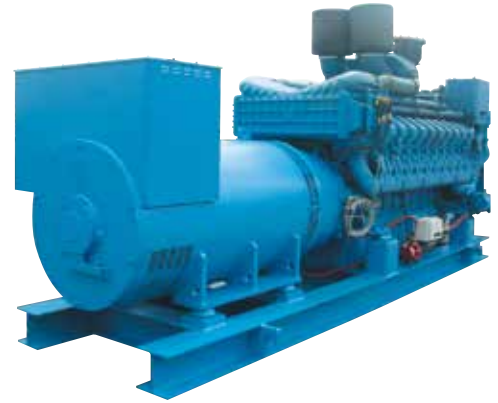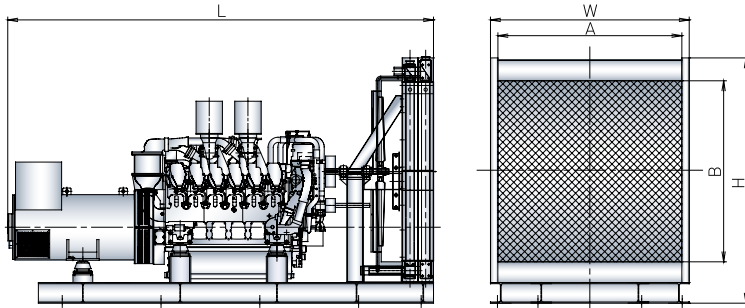

DATA Sheet

1800rpm, 60Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size			Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)		
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²	L				W		
HGMT 070	12V2000G45	700	630	3900	1580	2050	5090	5334	8	1500	1500	2.3	1300	1400	1.8	175.0	164.0	77.0	4500	2200
HGMT 080	12V2000G85	800	730	3900	1448	2174	5320	5564	8	1700	1700	2.9	1400	1300	1.8	217.0	164.0	77.0	4500	2100
HGMT 090	16V2000G45	900	820	4400	1900	2300	6630	6942	8	2050	2050	4.2	1800	1600	2.9	241.0	212.0	102.0	5000	2500
HGMT 100	16V2000G85	1000	910	4250	1898	2450	6680	6992	8	2050	2050	4.2	1800	1600	2.9	265.0	212.0	102.0	4900	2500
HGMT 120	18V2000G85	1200	1090	5000	2081	2745	8100	8550	8	2350	2350	5.5	2000	1900	3.8	314.0	216.0	130.0	5600	2700
HGMT 125	18V2000G76S	1250	-	5036	2275	2454	9525	-	8	2350	2350	5.5	2000	1800	3.6	329.0	185.0	122.0	5700	2900
HGMT 160	12V4000G43	1600	1400	6200	2591	2936	13400	14477	14	2650	2650	7.0	2400	2000	4.8	406.0	690.0	260.0	6800	3200
HGMT 175	12V4000G83	1750	1600	6300	2591	2936	13950	15027	14	2650	2650	7.0	2400	2000	4.8	451.0	590.0	260.0	6900	3200
HGMT 210	16V4000G43	2100	1850	6700	2900	2887	16750	17857	14	2800	2800	7.8	2700	2000	5.4	534.0	670.0	300.0	7300	3500
HGMT 230	16V4000G83	2300	2100	7200	2900	2887	20120	20770	14	2800	2800	7.8	2700	2000	5.4	605.0	700.0	300.0	7800	3500
HGMT 250	16V4000G83L	2500	-	7156	2299	3324	22045	-	14	2800	2800	7.8	2700	2000	5.4	693.0	712.0	300.0	7800	2900
HGMT 250	20V4000G43	2500	2300	7700	2900	2887	22200	22880	16	2800	2800	7.8	2700	2000	5.4	635.0	735.0	390.0	8300	3500
HGMT 280	20V4000G83	2800	2500	7900	4638	2795	25650	26510	16	3400	3400	11.6	4100	1900	7.8	713.0	915.0	390.0	8500	5300
HGMT 330	20V4000G83L	3300	2800	7900	4638	2795	26750	27640	16	3400	3400	11.6	4100	1900	7.8	879.0	945.0	390.0	8500	5300

DATA Sheet


1500rpm, 50Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size			Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)		
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²	L				W		
HGMT 056	12V2000G25	560	510	3900	1488	2050	5090	5334	8	1700	1700	2.9	1400	1300	1.9	149.0	164.0	77.0	4500	2100
HGMT 065	12V2000G76F	650	590	4440	1910	2190	6260	-	8	1700	1700	2.9	1400	1400	1.9	174.6	122.0	80.0	5100	2500
HGMT 068	12V2000G65	680	620	3900	1488	2050	5340	5584	8	1700	1700	2.9	1400	1300	1.9	180.0	164.0	77.0	4500	2100
HGMT 080	12V2000G86F	800	620	4440	1910	2190	6260	-	8	1700	1700	2.9	1400	1400	1.9	203.0	122.0	80.0	5100	2500
HGMT 080	16V2000G25	800	720	4250	1581	2450	6520	6820	8	1900	1900	3.7	1400	1600	2.3	207.0	200.0	102.0	4900	2200
HGMT 087	16V2000G76F	870	800	4830	1990	2200	7100	-	8	1900	1900	3.7	1800	1700	2.3	237.1	153.0	102.0	5500	2600
HGMT 088	16V2000G65	880	800	4250	1581	2450	6570	6870	8	1900	1900	3.7	1400	1600	2.3	227.0	200.0	102.0	4900	2200
HGMT 100	16V2000G86F	1000	800	4830	1990	2220	7100	-	8	1900	1900	3.7	1800	1700	2.3	255.8	153.0	102.0	5500	2600
HGMT 100	18V2000G65	1000	900	4700	1898	2450	7230	7582	8	2050	2050	4.4	1800	1600	2.9	262.0	212.0	130.0	5300	2500
HGMT 112	18V2000G76F	1120	1000	5040	1990	2200	8200	-	8	2050	2050	4.4	1800	1700	2.9	285.7	156.0	110.0	5700	2600
HGMT 110	12V4000G23R	-	1100	6007	2591	2936	13000	14077	14	2650	2650	4.2	1800	1700	4.8	275.0	690.0	260.0	6600	3200
HGMT 145	12V4000G23	1450	1300	6007	2591	2936	13000	14077	14	2650	2650	7.2	2400	2000	4.8	345.0	690.0	260.0	6600	3200
HGMT 160	12V4000G63	1600	1450	6000	2591	2936	13000	13977	14	2650	2650	7.2	2400	2000	4.8	394.0	590.0	260.0	6600	3200
HGMT 180	16V4000G23	1800	1650	6700	2900	2887	17060	18167	14	2800	2800	8.1	2700	2000	5.4	433.0	670.0	300.0	7300	3500
HGMT 200	16V4000G63	2000	1800	6700	2900	2887	17910	19047	14	2800	2800	8.1	2700	2000	5.4	495.0	700.0	300.0	7300	3500
HGMT 225	20V4000G23	2250	2000	7636	2900	2887	22780	24059	16	2800	2800	8.1	2700	2000	5.4	549.0	735.0	390.0	8300	3500
HGMT 245	20V4000G63	2450	2200	7600	4638	2795	23220	24680	16	3400	3400	11.7	4100	1900	7.8	596.0	915.0	390.0	8200	5300
HGMT 265	20V4000G63L	2650	2400	7664	4638	2795	24020	25509	16	3400	3400	11.7	4100	1900	7.8	646.0	945.0	390.0	8300	5300

High Speed Generator Set

CUMMINS Engine (HGCU Series 250 ~ 3500 kW)

Outline Drawing

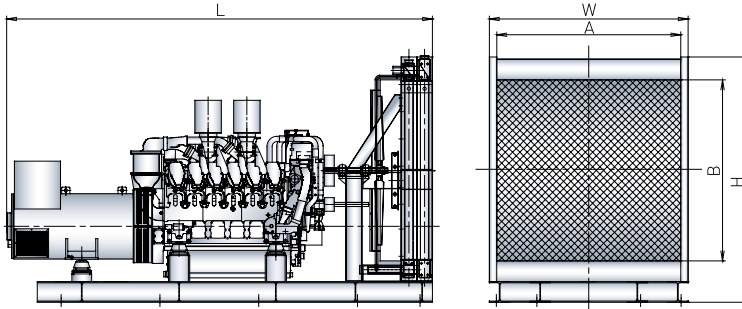


DATA Sheet

1800RPM, 60Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGCU 025	QSL9-G3	250	227	3135	1100	1928	2119	2684	4	1350	1350	1.8	1000	1200	1.2	77.0	28.6	26.5	3800	1700
HGCU 027	QSL9-G4	275	250	3135	1100	1928	2518	3157	4	1350	1350	1.8	1000	1200	1.2	82.0	28.6	26.5	3800	1700
HGCU 030	QSL9-G5	300	273	3135	1100	1928	2518	3157	6	1350	1350	1.8	1000	1200	1.2	89.0	28.6	26.5	3800	1700
HGCU 035	NTA855-G3	350	315	3156	1000	1914	3032	3143	6	1200	1200	1.4	950	950	0.9	96.0	65.8	36.0	3800	1600
HGCU 040	NTA855-G5	400	N/A	3156	1000	1914	3032	3143	6	1200	1200	1.4	950	950	0.9	110.0	65.8	34.1	3800	1600
HGCU 045	QSX15-G9	450	410	3494	1500	1807	3700	3860	6	1400	1400	2.0	1150	1100	1.3	123.0	65.9	83.0	4100	2100
HGCU 050	QSX15-G9	500	450	3494	1500	1807	3700	3860	6	1400	1400	2.0	1150	1100	1.3	139.0	65.9	83.0	4100	2100
HGCU 060	VTA28-G5	600	436	3819	1483	2037	5604	5880	6	1700	1700	2.9	1400	1350	1.9	173.0	166.0	83.0	4500	2100
HGCU 075	VTA28-G7	750	N/A	4080	1756	2181	6278	6568	6	1900	1900	3.6	1600	1550	2.5	221.0	162.0	68.0	4700	2400
HGCU 082	KTA38-G2	800	727	4593	1502	2086	6700	7023	6	1700	1700	2.9	1350	1400	1.9	212.0	95.5	95.0	5200	2100
HGCU 092	QST30-G3	900	823	4230	1756	2248	6890	7295	12	2000	2000	4.0	1600	1600	2.6	228.0	169.0	133.0	4900	2400
HGCU 100	QST30-G4	1000	910	4469	1755	2248	7488	7768	12	2000	2000	4.0	1600	1550	2.5	267.0	302.0	133.0	5000	2400
HGCU 127	KTA50-G3	1250	1135	5283	2066	2233	9960	10400	12	2200	2200	4.8	1950	1650	3.2	330.0	351.0	151.0	5900	2700
HGCU 154	KTA50-G9	1500	1295	5637	2250	2250	11300	12000	14	2300	2300	5.3	2100	1650	3.5	392.0	400.0	178.0	6300	2900
HGCU 200	QSK60-G6	2000	1825	5828	2270	2550	15245	16000	16	2450	2450	6.0	2200	1900	4.2	521.0	410.0	261.0	6500	2900
HGCU 225	QSK60-G14	2250	1825	5842	2270	2800	17000	17000	14	2500	3100	7.8	2200	1900	4.2	366.0	410.0	261.0	6500	2900
HGCU 250	QSK78-G8	2500	2235	6965	2965	3371	20588	21408	16	2700	2700	7.3	3000	3700	11.1	644.0	450.0	413.0	4600	3600
HGCU 275	QSK78-G8	2750	2500	6965	2965	3371	20790	21733	16	2700	2700	7.3	3000	4000	12.0	704.0	997.0	413.0	4600	3600
HGCU 300	QSK95-G2	3000	2750	7902	3028	29526	29500	31200	20	4500	4200	18.9	3700	3500	13.0	753.0	1120.0	647.0	8500	3700
HGCU 325	QSK95-G2	3250	3000	7902	3028	29526	29500	31200	20	4500	4200	18.9	3700	3500	13.0	821.0	1120.0	647.0	8500	3700
HGCU 350	QSK95-G2	3500	3000	7902	3028	29526	29500	31200	20	4500	4200	18.9	3700	3500	13.0	828.0	1196.0	647.0	8500	3700

CUMMINS Engine (HGCU Series 220 ~ 3000 kW)

Outline Drawing

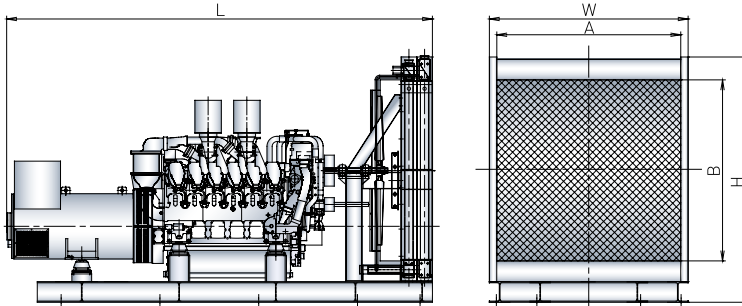

DATA Sheet



1500rpm, 50Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGCU 022	QSL9-G5	220	200	3135	1100	1928	2518	3157	4	1350	1350	1.8	1000	1200	1.2	69.0	28.6	26.5	3800	1700
HGCU 024	QSL9-G5	240	220	3135	1100	1928	2518	3157	6	1350	1350	1.8	1000	1200	1.2	75.0	28.6	26.5	3800	1700
HGCU 028	NTA855-G6	280	252	3156	1000	1914	3032	3143	6	1200	1200	1.4	950	950	0.9	87.0	65.8	36.0	3800	1600
HGCU 030	NTA855-G4	312	280	3156	1000	1914	3032	3143	6	1200	1200	1.4	950	950	0.9	99.0	65.8	34.1	3800	1600
HGCU 035	QSX15-G8	360	327	3494	1500	1807	3700	3860	6	1400	1400	2.0	1150	1100	1.3	94.2	65.9	83.0	4100	2100
HGCU 040	QSX15-G8	400	364	3494	1500	1807	3700	3860	6	1400	1400	2.0	1150	1100	1.3	106.2	65.9	83.0	4100	2100
HGCU 056	VTA28-G5	560	N/A	3819	1483	2037	5604	5880	6	1700	1700	2.9	1350	1400	1.9	154.0	166.0	83.0	4500	2100
HGCU 072	KTA38-G2	720	648	4593	1502	2086	6700	7023	6	1700	1700	2.9	1350	1400	1.9	178.0	95.5	135.0	5200	2100
HGCU 080	QST30-G3	800	728	4230	1756	2248	6890	7295	8	2000	2000	4.0	1600	1600	2.6	207.0	169.0	133.0	4900	2400
HGCU 088	QST30-G4	880	800	4469	1755	2248	7488	7768	8	2000	2000	4.0	1600	1550	2.5	240.0	302.0	133.0	5100	2400
HGCU 112	KTA50-G3	1120	1020	5283	2066	2233	9960	10400	12	2200	2200	4.8	1950	1650	3.2	330.0	351.0	151.0	5900	2700
HGCU 134	KTA50-G8	1340	1120	5637	2250	2250	11300	12000	12	2500	2500	6.3	2250	2250	5.1	345.0	400.0	178.0	6300	2900
HGCU 160	QSK60-G3	1600	1500	5828	2270	2550	15245	16000	14	2500	2800	7.0	2250	2550	5.7	408.0	410.0	261.0	6500	2900
HGCU 180	QSK60-G4	1800	1636	5891	2270	2550	15245	16000	14	2500	2800	7.0	2250	2550	5.7	437.0	621.0	261.0	6500	2900
HGCU 200	QSK60-G13	2000	1600	5842	2270	2800	17000	17000	14	2500	3100	7.8	2200	1900	4.2	366.0	410.0	261.0	6500	2900
HGCU 240	QSK78-G9	2400	2200	6965	2965	3371	20790	21733	16	2700	2700	7.3	3000	4000	12.0	569.0	997.0	413.0	7600	3600
HGCU 280	QSK95-G4	2800	2500	7902	3028	3663	29526	31194	20	4500	4200	18.9	3700	3500	13.0	662.0	1120.0	647.0	8500	3700
HGCU 300	QSK95-G4	3000	2680	7902	3028	3663	29526	31194	20	4500	4200	18.9	3700	3500	13.0	704.0	1120.0	647.0	8500	3700

High Speed Generator Set

CATERPILLAR Engine (HGCA Series 200 ~ 4000 kW)

Outline Drawing

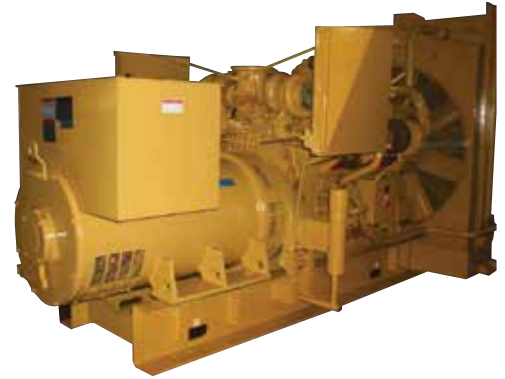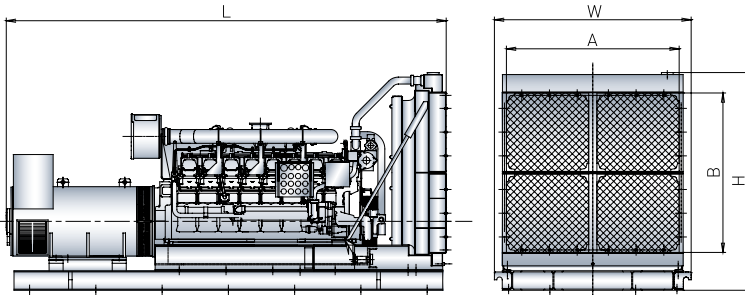

DATA Sheet



1800RPM, 60Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGCA 020	C9	200	180	2662	1030	1614	3500	5	1300	1400	1.7	1200	1200	1.4	53.9	33.0	41.0	3200	1700	
HGCA 025	C9	250	225	2662	1030	1614	3500	5	1300	1400	1.7	1200	1200	1.4	66.2	33.0	41.0	3200	1700	
HGCA 030	C9	300	275	3300	1100	1760	3500	5	1300	1400	1.7	1200	1200	1.4	80.4	33.0	41.0	4000	1700	
HGCA 035	C13	350	320	3800	1155	2066	4000	6	1300	1400	1.7	1200	1200	1.4	95.1	38.0	36.0	4500	1700	
HGCA 040	C13	400	350	3800	1155	2066	4000	6	1300	1400	1.7	1200	1200	1.4	107.7	38.0	36.0	4500	1700	
HGCA 045	C15	450	410	3830	1135	2160	4500	6	1400	1500	2.0	1300	1300	1.7	119.4	38.0	60.0	4500	1700	
HGCA 050	C15	500	455	3830	1135	2160	4500	6	1400	1500	2.0	1300	1300	1.7	127.2	38.0	60.0	4500	1700	
HGCA 055	C18	550	500	3910	1485	2101	5000	8	1500	1400	2.0	1400	1200	1.7	147.8	38.0	67.0	4600	2000	
HGCA 060	C18	600	545	3910	1485	2101	5000	8	1500	1400	2.0	1400	1200	1.7	163.0	38.0	67.0	4600	2000	
HGCA 070	3412	700	635	4125	1990	1906	6500	8	1700	1600	2.7	1600	1400	2.2	188.1	120.0	139.0	4800	1900	
HGCA 075	3412	750	680	4125	1990	1906	6500	8	1700	1600	2.7	1600	1400	2.2	206.3	120.0	139.0	4800	1900	
HGCA 080	3412	800	725	4125	1990	1906	6500	8	1700	1600	2.7	1600	1400	2.2	221.9	120.0	139.0	4800	1900	
HGCA 100	C32	1000	910	4348	2187	2174	0	10000	12	1600	2000	3.2	1600	1700	2.8	262.7	147.0	99.0	5100	2600
HGCA 125	3512	1250	1135	5138	1975	2368	0	13000	12	2200	2400	5.3	2200	2000	4.4	354.0	287.0	310.0	5800	2600
HGCA 150	3512B	1500	1360	5252	2286	2367	0	14500	14	2200	2400	5.3	2200	2000	4.4	404.1	322.0	310.0	6000	3000
HGCA 175	3516	1750	1600	6350	2286	2367	0	17500	16	2200	2400	5.3	2200	2000	4.4	469.8	398.0	401.3	7000	3000
HGCA 200	3516B	2000	1825	6247	2286	2494	0	18500	16	2400	3100	7.5	2400	2500	6.0	530.8	370.0	401.3	7000	3000
HGCA 250	3516C	2500	2250	7018	2569	3009	0	20000	20	2500	3300	8.3	2400	2500	6.0	656.8	504.0	466.0	7700	3200
HGCA 300	C175-16	3000	2725	7766	2889	3409	0	28000	20	3000	3000	9.0	2900	2700	7.8	806.0	1039.0	540.0	8400	3500
HGCA 310	C175-16	3100	2825	5970	2164	2211	0	23000	20	2500	2500	6.2	2000	2600	5.2	806.0	1039.0	540.0	6600	2900
HGCA 390	C175-20	3900	3600	8389	3249	3827	0	35000	24	3400	3500	12.0	3200	3200	10.0	1038.5	1285.0	675.0	9200	4000
HGCA 400	C175-20	4000	3600	6719	2377	2556	0	29000	24	2800	2700	7.6	2500	2600	6.4	1038.5	1285.0	675.0	7200	3000

* Rating does not include package mounted radiator

CATERPILLAR Engine (HGCA Series 200 ~ 3200 kW)

Outline Drawing

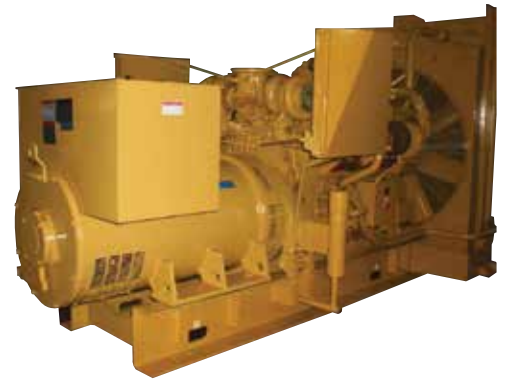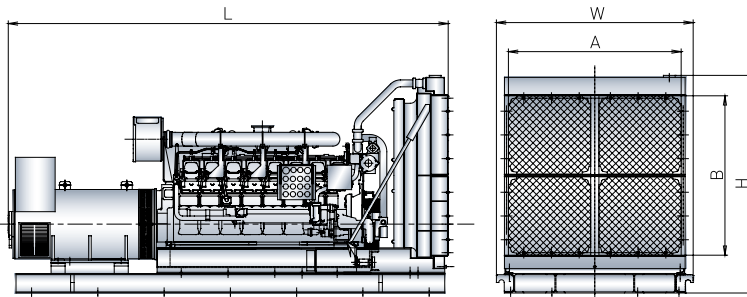

DATA Sheet

1500RPM, 50Hz


Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)		
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W	
HGCA 020	C9	200	184	2662	1030	1614	2100	5	1600	1600	2.6	1600	1600	2.5	48.4	38	39	3300	1700
HGCA 022	C9	220	200	2662	1030	1614	2100	5	1600	1600	2.6	1600	1600	2.5	52.4	38	39	3300	1700
HGCA 024	C9	240	220	3300	1100	1760	2140	5	1600	1600	2.6	1600	1600	2.6	59.2	38	39	3900	1700
HGCA 026	C9	264	240	3300	1100	1760	2260	5	1600	1600	2.7	1600	1600	2.6	63.5	38	39	3900	1700
HGCA 032	C13	320	280	3800	1131	2156	3240	6	1600	1600	2.6	1600	1600	2.6	72.4	39	40	4400	1800
HGCA 036	C13	360	320	3800	1131	2156	3270	6	1600	1600	2.7	1600	1600	2.6	82.9	39	40	4400	1800
HGCA 040	C15	400	364	3787	1481	2193	3730	6	2000	2000	4.0	2000	2000	3.9	94.5	38	60	4400	2100
HGCA 044	C15	440	400	3830	1130	2215	4860	6	2000	2000	4.0	2000	2000	3.9	102.0	38	60	4500	1800
HGCA 048	C18	484	440	3910	1461	2155	4330	8	2000	2000	4.0	2000	2000	3.8	111.0	38	76	4600	2100
HGCA 052	C18	528	480	3910	1461	2155	4330	8	2000	2000	4.0	2000	2000	3.9	122.7	38	76	4600	2100
HGCA 057	C18	572	520	3910	1461	2155	4370	8	2000	2000	4.1	2000	2000	3.9	130.6	38	76	4600	2100
HGCA 060	3412C	600	544	4125	1989	1906	6200	8	2600	2600	6.6	2500	2500	6.4	144.9	142	139	4800	2600
HGCA 064	3412C	640	580	4125	1989	1906	6300	8	2600	2600	6.7	2500	2500	6.5	153.7	142	139	4800	2600
HGCA 072	3412C	720	648	4485	1742	1987	6400	8	2600	2600	6.8	2600	2600	6.5	171.5	142	139	5100	2400
HGCA 088	C32	880	800	4270	2011	2174	7000	8	2400	2400	5.6	2300	2300	5.3	206.7	226	99	4900	2700
HGCA 100	C32	1000	880	4370	2011	2174	7000	8	2400	2400	5.7	2300	2300	5.3	220.7	226	99	5000	2700
HGCA 100	3512	1000	920	5138	1975	2174	11300	8	2400	2400	5.8	2300	2300	5.4	241.8	342	318	5800	2600
HGCA 112	3512	1120	1020	5138	1975	2368	11500	8	2400	2400	5.9	2300	2300	5.5	264.5	342	318	5800	2600
HGCA 120	3512B	1200	1088	5241	2286	2342	11600	8	2500	2500	6.1	2400	2400	5.6	298.7	401	318	5900	2900
HGCA 128	3512B	1280	1200	5241	2286	2342	12200	8	2500	2500	6.2	2400	2400	5.7	336.4	401	318	5900	2900
HGCA 140	3512B	1400	1280	5469	1988	2367	14520	14	2900	2900	8.2	2800	2800	7.6	340.3	401	318	6100	2600
HGCA 150	3512B	1500	1360	5877	1988	2367	14520	14	2900	2900	8.2	2800	2800	7.6	344.4	401	318	6500	2600
HGCA 160	3516	1600	1460	5913	2286	2410	14520	16	3500	3500	12.6	3500	3500	12.1	382.7	436	405	6600	2900
HGCA 180	3516B	1800	1600	5963	2286	2494	14000	16	3200	3200	10.5	3100	3100	9.9	395.9	480	405	6600	2900
HGCA 200	3516B	2000	1820	6376	2286	2494	14000	16	3400	3400	11.2	3200	3200	10.5	488.3	480	405	7000	2900
HGCA 220	3516C	2200	2000	5492	1678	2043	15500	20	4200	4200	17.4	4100	4100	16.6	521.8	505	405	6100	2300
HGCA 240	C175-16	2400	2180	7900	2756	3307	22000	20	4300	4300	18.2	4200	4200	17.4	559.6	1083	454	8500	3400
HGCA 248	C175-16*	2480	2260	6137	2110	2211	18500	20	4300	4300	18.2	4200	4200	17.4	553.3	1083	454	6800	2800
HGCA 312	C175-20	3120	2800	8397	3244	3827	28500	24	4500	4500	19.8	4300	4300	18.7	709.7	1274	757	9000	3900
HGCA 320	C175-20*	3200	2880	6643	2243	2224	23845	24	4500	4500	19.8	4300	4300	18.7	709.7	1274	757	7300	2900

* Rating does not include package mounted radiator

High Speed Generator Set

MITSUBISHI Engine (HGMI Series 510 ~ 2000 kW)

Outline Drawing

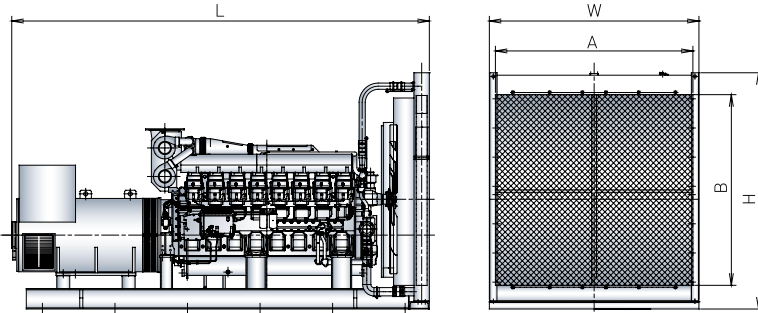

DATA Sheet

1800RPM, 60Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGMI 060	S6R-PTA	600	530	3454	1410	1790	5290	5497	8	1400	1400	2.0	1400	1100	1.5	157.0	113.0	94.0	4100	2100
HGMI 080	S12A2-PTA	800	675	3970	1600	2100	6290	6625	8	1600	1600	2.6	1500	1300	2.0	222.0	215.0	120.0	4600	2200
MGMI 090	S12A2-PTA2	850	773	4000	1600	2100	6850	7000	8	1600	1600	2.6	1500	1300	2.0	237.0	220.0	120.0	4600	2200
HGMI 100	S12H-PTA	1000	900	4370	1650	2320	8180	8624	8	1800	1800	3.2	1600	1600	2.6	265.0	244.0	200.0	5000	2300
HGMI 125	S12R-PTA	1200	1060	4620	1820	2540	9620	10135	12	2000	2000	4.0	1800	1700	3.1	314.0	335.0	180.0	5300	2500
HGMI 130	S12R-PTA2	1300	1200	4620	1830	2870	11000	11485	12	2100	2100	4.4	1800	2000	3.6	358.0	305.0	180.0	5300	2500
HGMI 150	S12R-PTAA2	1500	1350	5000	2200	2925	11400	11897	12	2100	2100	4.4	1800	2000	3.6	388.0	305.0	180.0	5600	2800
HGMI 160	S16R-PTA	1600	1445	5300	1860	2750	13050	13630	14	2200	2200	4.8	1800	2100	3.8	408.0	350.0	230.0	5900	2500
HGMI 180	S16R-PTA2	1800	1620	5180	2600	2900	12840	13515	14	2800	2800	7.8	2500	2400	6.0	479.0	445.0	230.0	5800	3200
HGMI 200	S16R-PTAA2	2000	1780	5750	2610	3325	13670	14300	14	2600	2600	6.8	2100	2500	5.3	521.0	400.0	230.0	6400	3300


DATA Sheet

1500RPM, 50Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGMI 050	S6R-PTA	510	460	3454	1410	1790	5290	5497	8	1400	1400	2.0	1400	1100	1.5	157.0	113.0	94.0	4100	2000
HGMI 067	S12A2-PTA	670	600	3970	1600	2100	6290	6625	8	1600	1600	2.6	1500	1300	2.0	222.0	215.0	120.0	4600	2200
HGMI 075	S12A2-PTA2	750	682	4000	1600	2100	6850	7000	8	1600	1600	2.6	1500	1300	2.0	237.0	220.0	120.0	4600	2200
HGMI 090	S12H-PTA	910	825	4370	1650	2320	8180	8624	8	1800	1800	3.2	1600	1600	2.6	265.0	244.0	200.0	5000	2300
HGMI 110	S12R-PTA	1110	1000	4620	1820	2540	9620	10135	12	2000	2000	4.0	1800	1700	3.1	314.0	335.0	180.0	5300	2500
HGMI 120	S12R-PTA2	1200	1085	4620	1830	2870	11000	11485	12	2100	2100	4.4	1800	2000	3.6	358.0	305.0	180.0	5300	3500
HGMI 130	S12R-PTAA2	1315	1190	5000	2200	2925	11400	11897	12	2100	2100	4.4	1800	2000	3.6	388.0	305.0	180.0	5600	2800
HGMI 150	S16R-PTA	1490	1350	5300	1860	2750	13050	13630	14	2200	2200	4.8	1800	2100	3.8	408.0	350.0	230.0	5900	2500
HGMI 165	S16R-PTA2	1650	1500	5180	2600	2900	12840	13515	14	2800	2800	7.8	2500	2400	6.0	479.0	445.0	230.0	5800	3200
HGMI 178	S16R-PTAA2	1780	1580	5750	2610	3325	13670	14300	14	2600	2600	6.8	2100	2500	5.3	521.0	400.0	230.0	6400	3300

DOOSAN Engine (HGDO Series 50 ~ 750 kW)

Outline Drawing

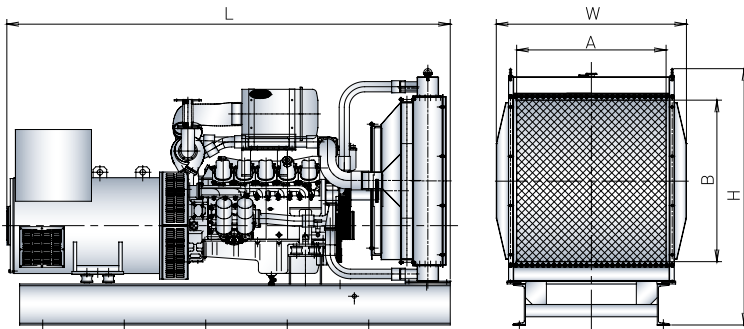

DATA Sheet

1800RPM, 60Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr, 100%)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGDO 006	DB58	60	55	2290	850	1380	950	1260	2.5	750	750	0.6	700	600	0.4	18.1	34.0	19.0	2900	1500
HGDO 009	D1146	90	82	2500	850	1448	1320	1620	2.5	750	750	0.6	700	600	0.4	26.6	38.5	15.5	3100	1500
HGDO 013	D1146T	130	118	2500	850	1448	1530	1730	4	750	750	0.6	700	600	0.4	35.9	38.5	15.5	3100	1500
HGDO 017	DE12T	175	159	2785	920	1498	1810	2020	4	900	900	0.8	800	800	0.6	49.0	41.0	23.0	3400	1600
HGDO 020	P086TI	200	180	2728	946	1613	1840	2050	4	1000	1000	1.0	800	900	0.7	56.8	48.5	15.5	3400	1600
HGDO 025	P126TI-3	250	220	2994	1100	1558	1980	2420	4	1000	1000	1.0	900	900	0.8	68.2	60.0	23.0	3600	1700
HGDO 027	P126TI	275	250	2994	1100	1558	2110	2420	4	1000	1000	1.0	900	900	0.8	76.5	60.0	23.0	3600	1700
HGDO 030	P126TI-II	300	270	2994	1100	1558	2240	2500	4	1000	1000	1.0	900	900	0.8	89.5	60.0	23.0	3600	1700
HGDO 033	P158LE-2	330	300	2990	1400	1868	2510	2750	4 X 2	1300	1300	1.7	1100	1200	1.3	93.5	88.5	28.0	3600	2000
HGDO 036	P158LE-1	360	320	2990	1400	1868	2610	2840	4 X 2	1300	1300	1.7	1100	1200	1.3	104.0	88.5	28.0	3600	2000
HGDO 040	P158LE	400	350	2990	1400	1868	2810	2940	4 X 2	1300	1300	1.7	1100	1200	1.3	115.7	88.5	28.0	3600	2000
HGDO 045	DP158LC	450	400	3000	1400	1800	2910	3050	4 X 2	1300	1300	1.7	1100	1200	1.3	123.8	79.0	22.0	3600	2000
HGDO 050	DP158LD	500	450	3000	1400	1900	3250	3320	4 X 2	1300	1300	1.7	1100	1200	1.3	139.6	79.0	22.0	3600	2000
HGDO 055	DP180LA	550	490	3200	1400	1900	3360	3520	4 X 2	1300	1300	1.7	1100	1200	1.3	154.1	91.0	34.0	3800	2000
HGDO 061	DP180LB	610	550	3200	1400	1900	3920	3990	4 X 2	1400	1400	2.0	1300	1200	1.6	165.3	91.0	34.0	3800	2000
HGDO 066	DP222LA	660	590	3400	1400	2200	4080	4150	4 X 2	1400	1400	2.0	1300	1200	1.6	179.9	114.0	40.0	4000	2000
HGDO 070	DP222LB	700	630	3400	1400	2200	4080	4150	4 X 2	1400	1400	2.0	1300	1200	1.6	192.8	114.0	40.0	4000	2000
HGDO 075	DP222LCS	750	670	3400	1400	2200	4320	4660	4 X 2	1650	1650	2.7	1500	1400	2.1	203.8	114.0	40.0	4000	2000

DATA Sheet


1500rpm, 50Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGDO 005	DB58	50	46	2290	850	1380	950	1260	2.5	750	750	0.6	700	600	0.4	15.3	34.0	19.0	2900	1500
HGDO 007	D1146	75	66	2500	850	1448	1320	1620	2.5	750	750	0.6	700	600	0.4	20.8	38.5	15.5	3100	1500
HGDO 010	D1146T	105	94	2500	830	1448	1530	1730	4	750	750	0.6	700	600	0.4	27.0	38.5	15.5	3100	1500
HGDO 015	DE12T	150	134	2785	920	1498	1810	2020	4	900	900	0.8	800	800	0.6	41.0	41.0	23.0	3400	1550
HGDO 017	P086TI	175	158	2728	946	1613	1840	2050	4	1000	1000	1.0	800	900	0.7	48.4	48.5	15.5	3400	1600
HGDO 022	P126TI-3	225	201	2994	1100	1558	1980	2420	4	1000	1000	1.0	900	900	0.8	59.6	60.0	23.0	3600	1700
HGDO 025	P126TI	250	220	2994	1100	1558	2110	2420	4	1000	1000	1.0	900	900	0.8	66.2	60.0	23.0	3600	1700
HGDO 027	P126TI-II	250	230	2994	1100	1558	2240	2500	4	1000	1000	1.0	900	900	0.8	77.6	60.0	23.0	3600	1700
HGDO 029	P158LE-2	280	250	2990	1400	1868	2510	2750	4 X 2	1300	1300	1.7	1100	1200	1.3	84.4	88.5	28.0	3600	2000
HGDO 033	P158LE-1	320	290	2990	1400	1868	2610	2840	4 X 2	1300	1300	1.7	1100	1200	1.3	93.6	88.5	28.0	3600	2000
HGDO 037	P158LE	360	310	2990	1400	1868	2810	2940	4 X 2	1300	1300	1.7	1100	1200	1.3	102.9	88.5	28.0	3600	2000
HGDO 039	DP158LC	390	360	3000	1400	1800	2910	3050	4 X 2	1300	1300	1.7	1100	1200	1.3	110.9	79.0	22.0	3600	2000
HGDO 046	DP158LD	460	420	3000	1400	1900	3250	3320	4 X 2	1300	1300	1.7	1100	1200	1.3	127.8	79.0	22.0	3600	2000
HGDO 049	DP180LA	490	450	3200	1400	1900	3360	3520	4 X 2	1300	1300	1.7	1100	1200	1.3	135.4	91.0	34.0	3800	2000
HGDO 045	DP180LB	570	510	3200	1400	1900	3250	3320	4 X 2	1300	1300	1.7	1100	1200	1.3	149.5	91.0	34.0	3800	2000
HGDO 060	DP222LB	600	545	3400	1400	2200	4080	4150	4 X 2	1400	1400	2.0	1300	1200	1.6	162.7	114.0	40.0	4000	2000
HGDO 066	DP222LCF	660	600	3400	1400	2200	4320	4660	4 X 2	1650	1650	2.7	1500	1400	2.1	172.8	114.0	40.0	4000	2000

High Speed Generator Set

PERKINS Engine (HGPE Series 55 ~ 2000 kW)

Outline Drawing

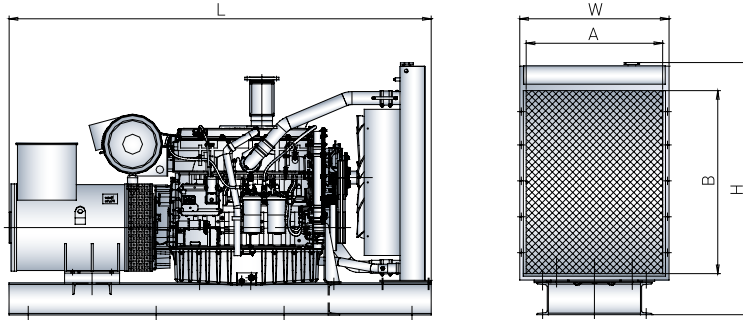

DATA Sheet

1800RPM, 60Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGPE 006	1103A-33TG2	60	54	2300	850	1400	950	1260	2	700	700	0.5	500	600	0.3	13.8	10.0	7.4	2900	1450
HGPE 010	1104C-44TAG2	100	91	2500	850	1500	1320	1620	3	750	800	0.6	600	600	0.4	29.7	12.0	8.0	3100	1450
HGPE 015	1106A-70TAG2	150	135	2800	950	1500	1810	2020	3	900	1000	0.9	700	900	0.6	41.7	21.0	18.0	3400	1550
HGPE 025	1506A-E88TAG3	250	230	3000	1100	1560	1980	2420	4	1000	1100	1.1	850	900	0.8	69.8	29.0	39.0	3600	1700
HGPE 035	2206C-E13TAG2	350	320	3000	1400	1900	2610	2840	5	1400	1400	1.7	1050	1100	1.2	90.0	51.0	40.0	3600	2000
HGPE 045	2506C-E15TAG1	450	400	3800	1150	2000	3337	3418	5	1400	1400	1.8	1050	1100	1.2	116.0	58.0	62.0	4400	1750
HGPE 055	2806C-E18TAG1A	550	500	3800	1550	2100	3850	3958	8	1650	1650	2.8	1300	1400	1.9	144.0	61.0	62.0	4400	2150
HGPE 060	2806A-E18TAG3	600	545	3850	1550	2100	4288	4396	8	1650	1650	2.8	1300	1400	1.9	158.0	61.0	62.0	4450	2150
HGPE 067	4006-23TAG2A	660	600	4300	1700	2200	4870	5009	8	2000	2000	4.0	1600	1600	2.6	199.0	105.0	113.0	4900	2300
HGPE 075	4006-23TAG3A	750	675	4500	1700	2200	4926	5065	8	2000	2000	4.0	1600	1600	2.6	224.0	105.0	113.0	5100	2300
HGPE 090	4008TAG2	900	810	4500	1750	2250	6500	7350	6 x 2	2200	2200	4.9	1800	1800	3.2	250.0	162.0	157.0	5100	2350
HGPE 110	4012-46TWG2A	1100	1000	4500	1750	2250	7130	7950	10 x 2	2200	2200	4.9	1800	1800	3.2	298.0	196.0	177.0	5100	2350
HGPE 120	4012-46TWG3A	1200	1091	5250	2000	2300	8500	9435	10 x 2	2200	2200	4.9	1800	1800	3.2	324.0	196.0	177.0	5850	2600
HGPE 132	4012-46TAG2A	1325	1200	5250	2000	2300	9100	9960	10 x 2	2200	2200	4.9	1800	1800	3.2	344.0	207.0	177.0	5850	2600
HGPE 135	4012-46TAG3A	1500	1350	5650	2250	2350	11300	12000	10 x 2	2350	2350	5.4	1900	1900	3.6	390.0	225.0	177.0	6250	2850

DATA Sheet

1500rpm, 50Hz

Generator Model	Engine Model	Emergency Output (kWe)	Prime Output (kWe)	Generator Sets (mm)			Weight (kg)		Exhaust Pipe (inch)	Air-Inlet Size		Air-Outlet Size		Fuel Consumption (liter/hr)	Cooling-Water Quantity (liter)	Lub-Oil Quantity (liter)	Foundaion Size (mm)			
				L	W	H	Dry	Wet		(WXH (mm))	M ²	(AXB (mm))	M ²				L	W		
HGPE 005	1103A-33TG2	55	47	2300	850	1400	950	1260	2	700	700	0.5	500	600	0.3	14.6	10.0	7.4	2900	1450
HGPE 009	1104C-44TAG2	90	80	2500	850	1500	1320	1620	3	750	800	0.6	600	600	0.4	24.9	13.0	8.0	3100	1450
HGPE 013	1106A-70TAG2	132	120	2800	950	1500	1810	2020	3	900	1000	0.9	700	900	0.6	36.1	21.0	18.0	3400	1550
HGPE 022	1506A-E88TAG3	225	205	3000	1100	1560	1980	2420	4	1000	1100	1.1	850	900	0.8	60.7	29.0	39.0	3600	1700
HGPE 032	2206C-E13TAG2	320	280	3000	1400	1900	2610	2840	5	1400	1400	1.7	1050	1100	1.2	84.0	51.0	40.0	3600	2000
HGPE 040	2506C-E15TAG1	400	364	3800	1150	2000	3337	3418	5	1400	1400	1.8	1050	1100	1.2	104.0	58.0	62.0	4400	1750
HGPE 052	2806C-E18TAG1A	520	473	3785	1550	2050	3850	3958	8	1650	1650	2.8	1300	1400	1.9	134.0	61.0	62.0	4385	2150
HGPE 056	2806A-E18TAG2	560	520	3845	1550	2100	4288	4396	8	1650	1650	2.8	1300	1400	1.9	143.0	61.0	62.0	4445	2150
HGPE 066	4006-23TAG2A	665	605	4350	1700	2200	4870	5009	8	2000	2000	4.0	1600	1600	2.6	176.0	105.0	113.0	4950	2300
HGPE 072	4006-23TAG3A	727	650	4500	1700	2215	4926	5065	8	2000	2000	4.0	1600	1600	2.6	194.0	105.0	113.0	5100	2300
HGPE 081	4008TAG2	812	817	4500	1750	2250	6500	7350	6 x 2	2200	2200	4.9	1800	1800	3.2	240.0	162.0	157.0	5100	2350
HGPE 112	4012-46TWG2A	1120	1000	4500	1750	2250	7130	7950	10 x 2	2200	2200	4.9	1800	1800	3.2	288.0	196.0	177.0	5100	2350
HGPE 120	4012-46TWG3A	1200	1091	5250	2000	2300	8500	9435	10 x 2	2200	2200	4.9	1800	1800	3.2	318.0	196.0	177.0	5850	2600
HGPE 132	4012-46TAG2A	1325	1200	5250	2000	2300	9100	9960	10 x 2	2200	2200	4.9	1800	1800	3.2	341.0	207.0	177.0	5850	2600
HGPE 150	4012-46TAG3A	1500	1350	5650	2250	2350	11300	12000	10 x 2	2350	2350	5.4	1900	1900	3.6	405.0	225.0	177.0	6250	2850
HGPE 160	4016-61TRG1	1600	1480	5700	2270	2550	15200	15900	10 x 2	3150	3150	10.0	2700	2700	7.3	401.0	210.0	213.0	6300	2870
HGPE 180	4016-61TRG2	1800	1600	5820	2300	2550	15245	16000	10 x 2	3150	3150	10.0	2700	2700	7.3	463.0	215.0	213.0	6420	2900
HGPE 200	4016-61TRG3	2000	1800	5850	2300	2800	17000	17730	10 x 2	3150	3150	10.0	2700	2700	7.3	529.0	260.0	213.0	6450	2900

Medium Speed Generator Set



Characteristic

Medium speed generator is designed to operate at 900rpm or below speed.

It is organized to variable system that is Excitation, Protection Device, Detector, etc. and manufactured according to specification (characteristic, type of drive and bearing) that is customer's requirement.

Application

Medium speed generator of Hyosung is supplied for main power source to industrial facilities, power plants, ships and applied to the use of engine, special purpose.

MEDIUM SPEED GENERATOR

Medium Speed Generator Set

General Data Sheet

6 POLE (1200 r/min)

at 450V, 60Hz, Amb. Temperature : 45°C, p.f 0.8

	Type	Output		Weight (kg)	Moment of Inertia (kg·m ²)	Rated Current (A)
		kVA	kW			
HMD	400S	563	450	2050	10.1	722
	400M	625	500	2150	10.9	802
	400L	688	550	2250	11.7	883
	450S	875	700	2500	18.3	1123
	450M	1000	800	2750	19.7	1284
	450L	1063	850	3000	21.1	1364
	500S	1500	1200	3250	29.2	1925
	500M	1688	1350	3500	35.1	2166
	500L	1875	1500	3700	42.1	2406
	560S	1938	1550	4600	55.4	2486
	560M	2188	1750	4900	62.1	2807
	560L	2375	1900	5200	67.2	3048
	630S	2625	2100	6600	117	3368
	630M	3000	2400	6900	129	3850
	630L	3375	2700	7200	138	4331
	630G	3625	2900	7550	149	4651
	710S	4125	3300	9000	198	5293
	710M	4500	3600	9500	220	5774
710L	4875	3900	10000	243	6255	
710G	5250	4200	10500	265	6736	

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

8 POLE (900 r/min)

at 450V, 60Hz, Amb. Temperature : 45°C, p.f 0.8

	Type	Output		Weight (kg)	Moment of Inertia (kg·m ²)	Rated Current (A)
		kVA	kW			
HMD	500S	1063	850	3250	29.2	1364
	500M	1125	900	3500	35.1	1444
	500L	1188	950	3700	42.1	1524
	560S	1375	1100	4600	55.4	1765
	560M	1563	1250	4900	62.1	2005
	560L	1750	1400	5200	67.2	2246
	630S	1875	1500	6600	117	2406
	630M	2250	1800	6900	129	2887
	630L	2625	2100	7200	138	3368
	630G	3000	2400	7550	149	3850
	710S	3500	2800	9000	198	4491
	710M	3750	3000	9500	220	4812
	710L	4000	3200	10000	243	5133
	710G	4375	3500	10500	280	5614
	800S	5000	4000	11000	400	6416
	800M	5375	4300	11900	420	6897
	800L	5875	4700	12800	450	7538
	800G	6125	4900	13500	490	7859

10 POLE (720 r/min)

at 450V, 60Hz, Amb. Temperature : 45°C, p.f 0.8


	Type	Output		Weight (kg)	Moment of Inertia (kg·m ²)	Rated Current (A)
		kVA	kW			
HMD	500S	688	550	3250	29.2	883
	500M	850	680	3500	35.1	1091
	500L	1032	825	3700	42.1	1324
	560S	1188	950	4600	55.4	1524
	560M	1438	1150	4900	62.1	1845
	560L	1750	1400	5200	67.2	2246
	630S	1875	1500	6600	117	2406
	630M	2075	1660	6900	129	2663
	630L	2275	1820	7700	138	2919
	630G	2500	2000	8400	149	3208
	710S	2750	2200	9000	198	3529
	710M	3063	2450	9500	220	3930
	710L	3313	2650	10000	243	4250
	710G	3625	2900	10500	280	4651
	800S	3750	3000	11000	400	4812
	800M	4375	3500	11900	420	5614
800L	5000	4000	12800	450	6416	
800G	5625	4500	13500	490	7217	

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

Medium Speed Generator Set

Outline Dimension Drawing

Double Anti Friction Bearing Type (DP)

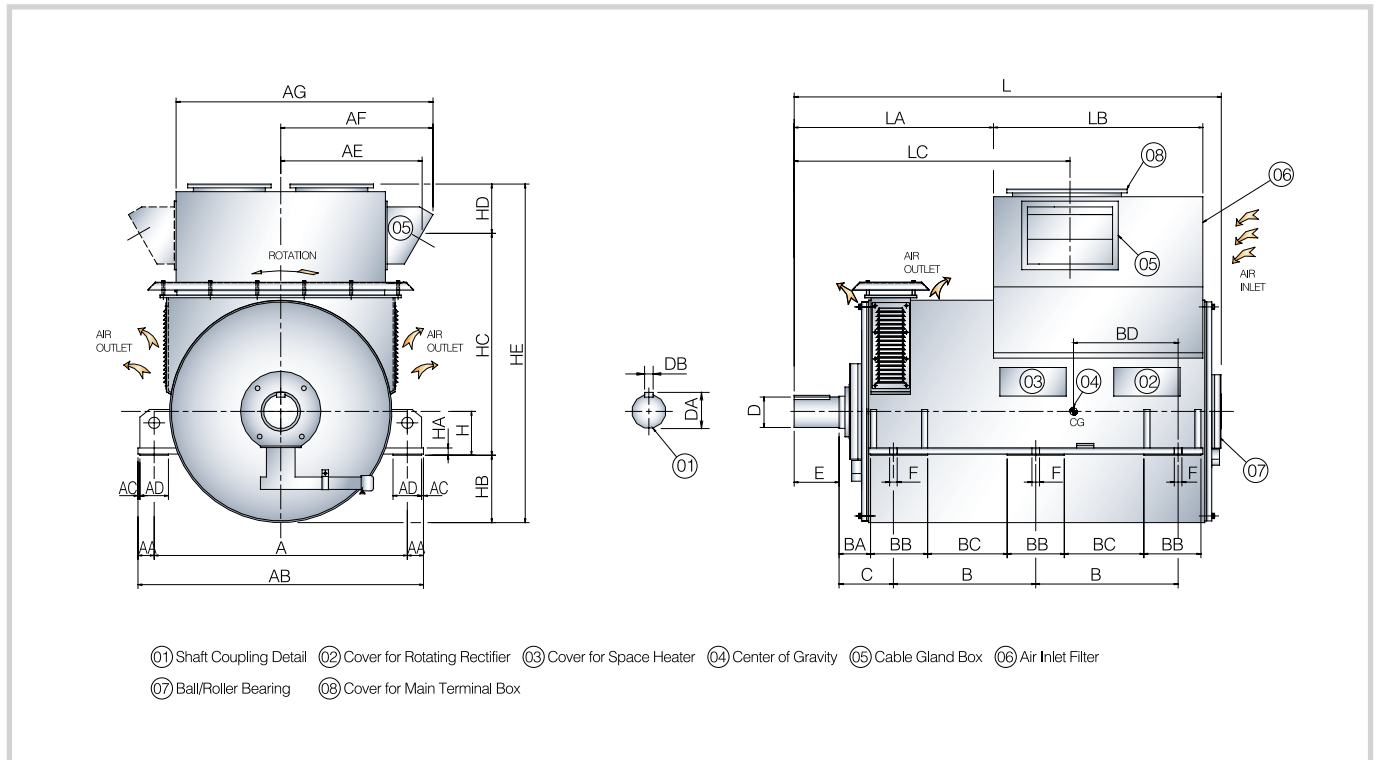


Unit : mm

Type	No. of Poles	A	AA	AB	AC	AD	AE	AF	AG	B	BA	BB	BC	BD	C	H	HA	HB	HC	HD	HE	L	LA	LB	LC	F	Shaft End				
																											D	E	DB	DA	
400S										585			245	565								1800	795		1070						
400M	6-8	980	85	1130	10	150	605	660	1080	635	105	300	295	615	214	230	41	195	920	210	1320	1900	895	900	1170	36	110	210	28	116	
400L										685			345	665								2000	995		1270						
450S										670			340	640								1995	1000		1295						
450M	6-8	1120	85	1290	10	150	640	696	1180	720	107	300	390	690	227	230	41	253	915	280	1448	2055	1100	900	1395	36	110	210	28	116	
450L										770			440	740								2155	1200		1495						
500S										705			373	710								2110	960		1255						
500M	6-10	1280	85	1450	10	150	685	770	1280	755	132	300	423	760	250	230	41	290	975	310	1575	2210	1060	1000	1355	42	125	220	32	132	
500L										805			473	810								2310	1160		1455						
560S										745			383	760								2220	980		1285						
560M	6-10	1350	85	1520	10	150	750	835	1385	795	142	300	433	810	260	230	41	350	1055	310	1715	2180	886	1100	1138	42	140	230	36	148	
560L										845			483	860								2280	986		1238						
630S										663			332	550								2100	880		1280						
630M	6-10	1470	85	1640	10	150	820	875	1525	713	150	300	382	600	270	230	41	425	1235	260	1920	2200	980	1100	1380	42	160	250	40	169	
630L										763			432	650								2300	1080		1480						
710S										678			348	550								2180	960		1360						
710M	6-10	1650	85	1820	10	200	865	925	1620	728	150	300	398	600	270	310	41	385	1425	260	2070	2280	1060	1100	1460	42	200	300	45	210	
710L										778			448	650								2380	1160		1560						

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

Single Sleeve Bearing Type (DP)

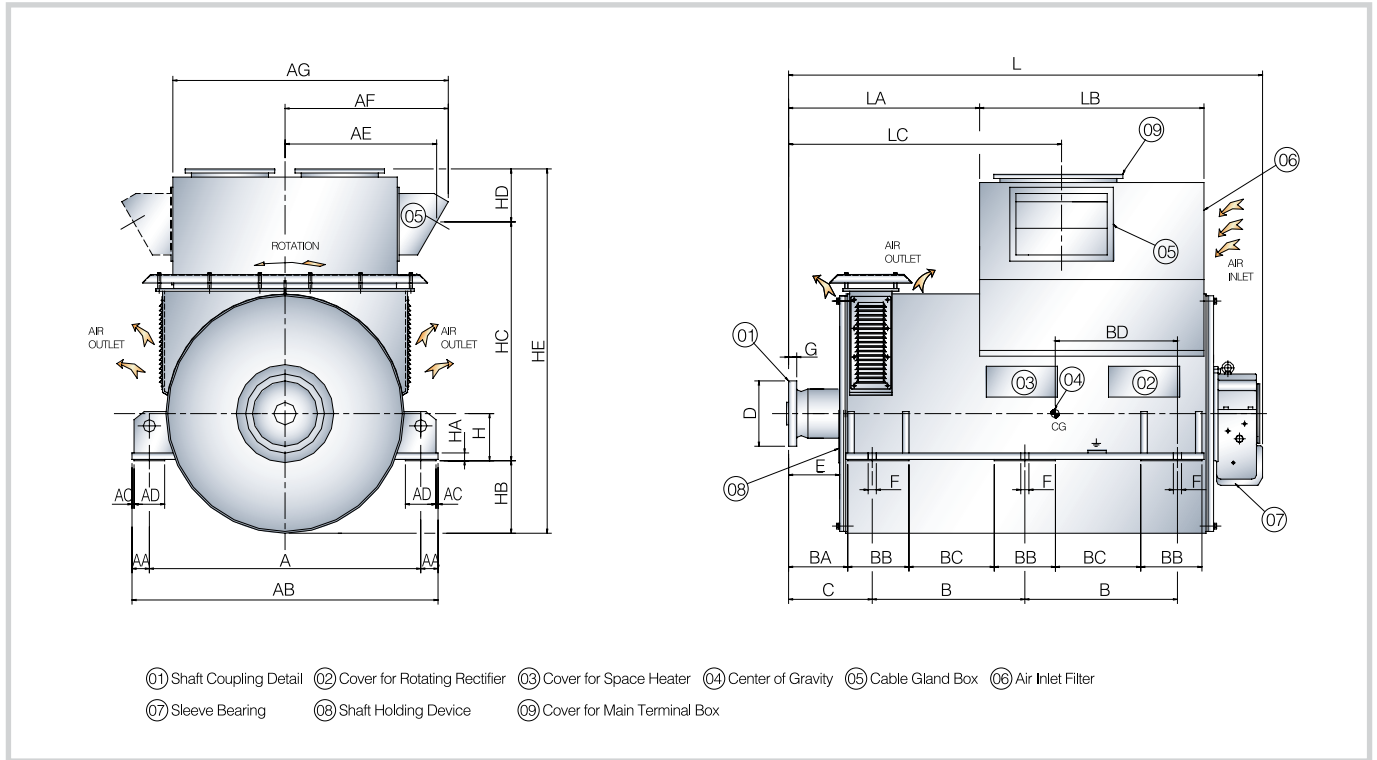


Unit : mm

Type	No. of Poles	A	AA	AB	AC	AD	AE	AF	AG	B	BA	BB	BC	BD	C	H	HA	HB	HC	HD	HE	L	LA	LB	LC	F	Shaft End		
		D	E	G																									
400S										585			245	565								1850	690	970					
400M	6-8	980	85	1130	10	150	605	660	1080	635	105	300	295	615	320	230	41	195	920	210	1320	1950	790	900	1070	36	260	160	32
400L										685			345	665								2050	890	1170					
450S										670			340	640								2120	965	1240					
450M	6-8	1120	85	1290	10	150	640	696	1180	720	107	300	390	690	400	230	41	253	915	280	1448	2220	1065	900	1340	36	319	240	40
450L										770			440	740								2320	1165	1440					
500S										705			373	710								2215	885	1170					
500M	6-10	1280	85	1450	10	150	685	770	1280	755	280	300	423	760	395	230	41	290	975	310	1575	2315	985	1000	1270	42	319	240	40
500L										805			473	810								2415	1085	1370					
560S										745			383	760								2300	895	1202					
560M	6-10	1350	85	1520	10	150	750	835	1385	795	290	300	433	810	410	230	41	350	1055	310	1715	2400	995	1100	1302	42	319	250	40
560L										845			483	860								2500	1095	1402					
630S										663			332	550								2215	826	1228					
630M	6-10	1470	85	1640	10	150	820	875	1525	713	350	300	382	600	470	230	41	425	1235	260	1920	2315	926	1100	1328	42	400	300	50
630L										763			432	650								2415	1026	1428					
710S										678			348	550								2245	858	1260					
710M	6-10	1650	85	1820	10	200	865	925	1620	728	350	300	398	600	470	310	41	385	1425	260	2070	2345	958	1100	1360	42	400	300	50
710L										778			448	650								2445	1058	1460					

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

Double Anti Friction Bearing Type (TE)

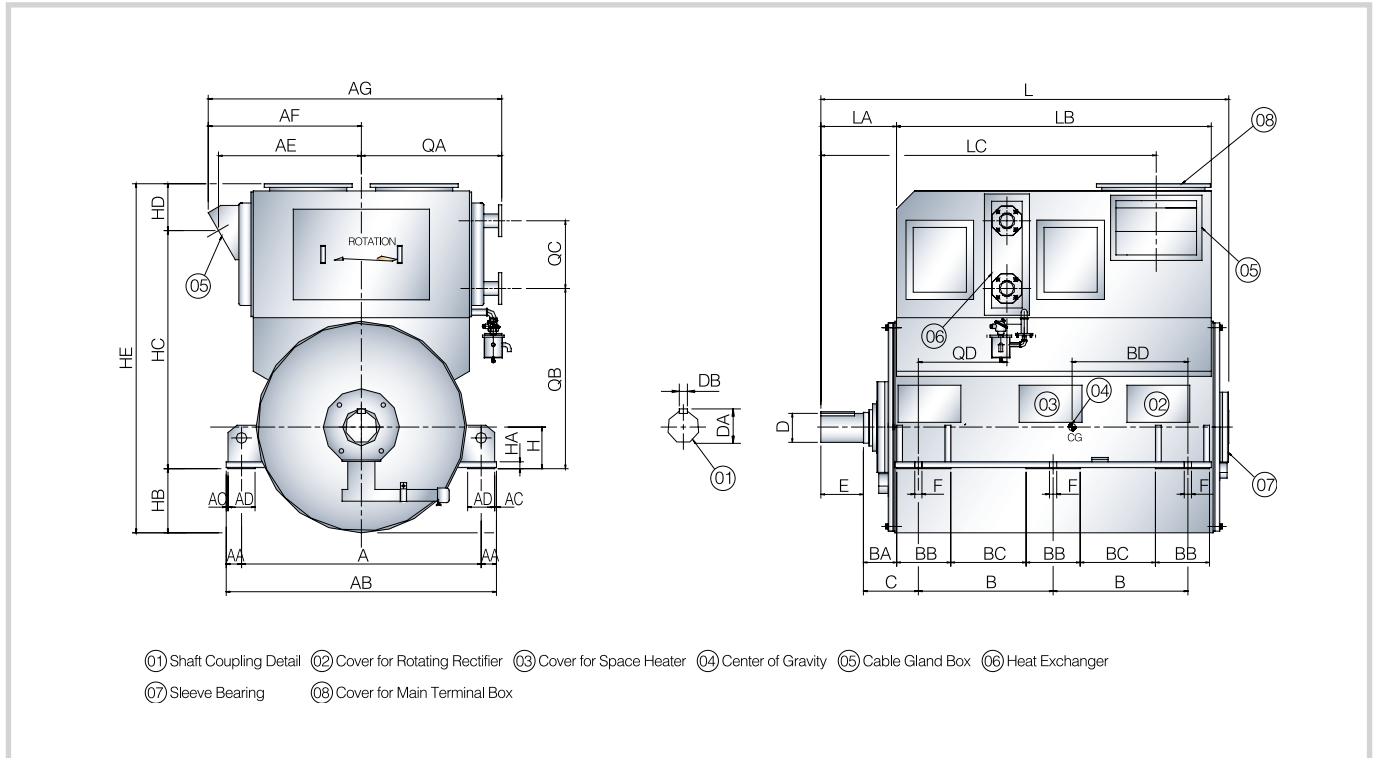

Unit : mm


Type	No. of Poles	Shaft End																Coolant																																																															
		A	AA	AB	AC	AD	AE	AF	AG	B	BA	BB	BC	BD	C	H	HA	HB	HC	HD	HE	L	LB	LA	LC	F	D	E	DB	DA	QA	QB	QC	QD																																															
560S									745			383	760								2220	1720		1790																																																									
560M	6-10	1350	85	1520	10	150	750	835	1385	142	300	433	810	260	230	41	350	1315	260	1930	2320	1820	378	1890	42	140	230	36	148	780	935	500	400																																																
560L																																						845		483	860																2420	1920		1990																					
560G																																														895			533	910								2520	2020		2090																				
630S																																														663			332	550								2100	1575		1670																				
630M	6-10	1470	85	1640	10	150	820	875	1525	150	300	382	600	270	230	41	425	1385	260	2000	2200	1675	400	1770	42	160	250	40	169	820	1000	500	400																																																
630L																																							763		432	650																2300	1775		1870																				
630G																																															813			482	700								2400	1875		1970																			
710S																																															678			348	550								2180	1645		1788																			
710M	6-10	1650	85	1820	10	200	865	925	1620	150	300	398	600	270	310	41	385	1495	270	2170	2280	1745	450	1888	42	200	300	45	210	870	1120	500	400																																																
710L																																								778		448	650																2380	1845		1988																			
710G																																																828			498	700								2480	1945		2088																		
800S																																																654			324	550								2100	1530		1675																		
800M	6-10	1850	85	2020	10	200	975	1035	1820	400	300	374	600	520	310	41	485	1595	270	2350	2200	1630	450	1775	47	220	300	50	237	925	1220	500	400																																																
800L																																									754		424	750																2300	1730		1875																		
800G																																																	804			464	800								2400	1830		1975																	

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

Medium Speed Generator Set

Outline Dimension Drawing

Double Sleeve Bearing Type (TE)

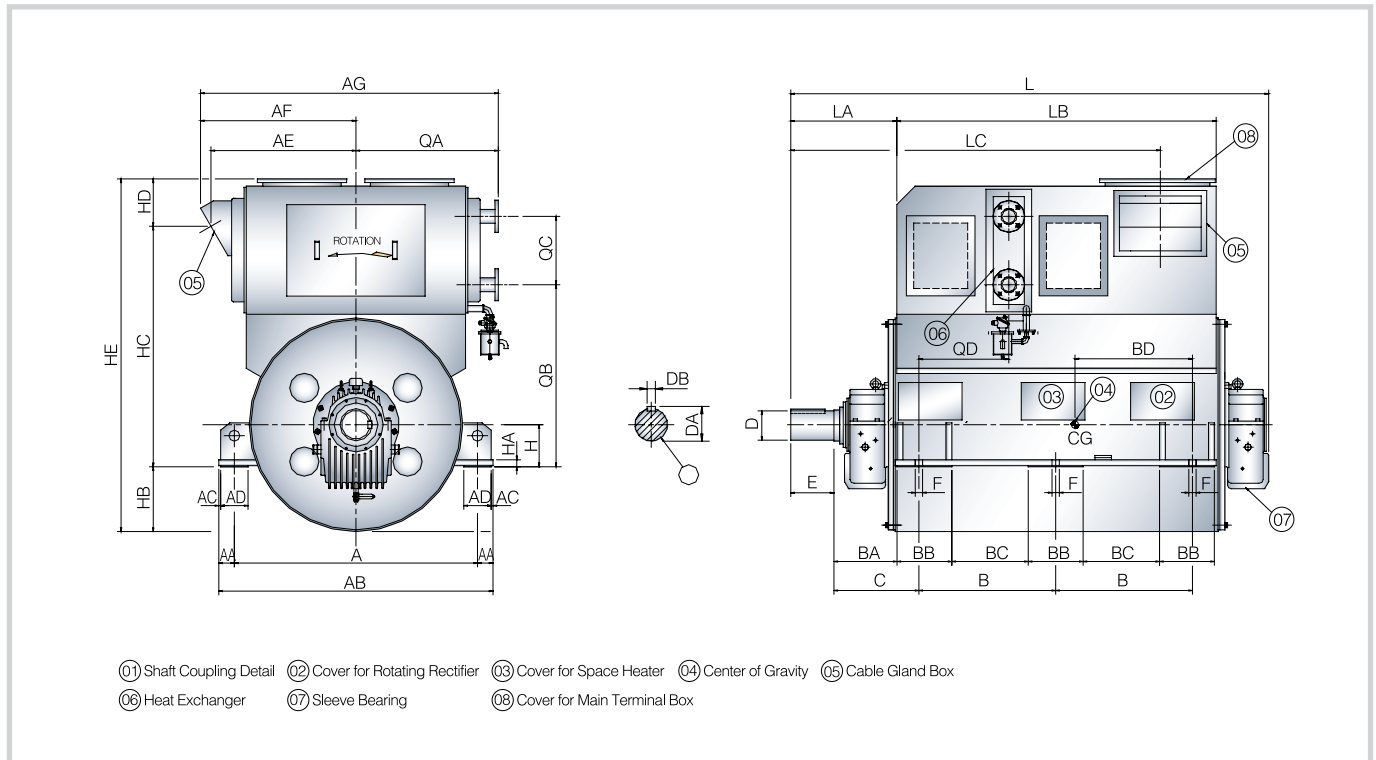

Unit : mm

Type	No. of Poles	A	AA	AB	AC	AD	AE	AF	AG	B	BA	BB	BC	BD	C	H	HA	HB	HC	HD	HE	L	LB	LA	LC	F	Shaft End		Coolant					
																											D	E	DB	DA	QA	QB	QC	QD
560S										745			383	760								2566	1720		1970									
560M	6-10	1350	85	1520	10	150	750	835	1385	795	142	300	433	810	260	230	41	350	1315	260	1930	2666	1820	558	2070	42	140	230	36	148	780	935	500	400
560L										845			483	860								2766	1920		2170									
560G										895			533	910								2876	2020		2270									
630S										663			332	550								2514	1575		1920									
630M	6-10	1470	85	1640	10	150	820	875	1525	713	150	300	382	600	270	230	41	425	1385	260	2000	2614	1675	650	2020	42	160	250	40	169	820	1000	500	400
630L										763			432	650								2714	1775		2120									
630G										813			482	700								2814	1875		2220									
710S										678			348	550								2642	1645		2038									
710M	6-10	1650	85	1820	10	200	865	925	1620	728	150	300	398	600	270	310	41	385	1495	270	2170	2742	1745	700	2138	42	200	300	45	210	870	1120	500	400
710L										778			448	650								2842	1845		2238									
710G										828			498	700								2942	1945		2338									
800S										654			324	550								2560	1530		1925									
800M	6-10	1850	85	2020	10	200	975	1035	1820	704	400	300	374	600	520	310	41	485	1595	270	2350	2660	1630	700	2025	47	220	300	50	237	925	1220	500	400
800L										754			424	750								2760	1730		2125									
800G										804			464	800								2860	1830		2225									

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

Control Panel



General

Control panel apply to high quality electrical device according to customer's required specification. It is possible to simply operate and check the condition of operation.

Main functions

- Auto sequencing
- Power monitoring
- Engine-generator set protection
- Parallel operation using RS485 (PC ↔ Digital controller)
- User interface
- ETC.

Characteristic

- Digital control using the MICOM
- The mass LCD (4 lines)
- Remote control and monitoring using computer
- Protection level (warning, shutdown)
- ETC.


Protection

- Low Lube. oil pressure
- High coolant temperature
- Starting failure
- Overspeed
- Emergency stop
- ETC.

FREE-STANDING CONTROL PANEL

Control Panel

Generator Control Panel

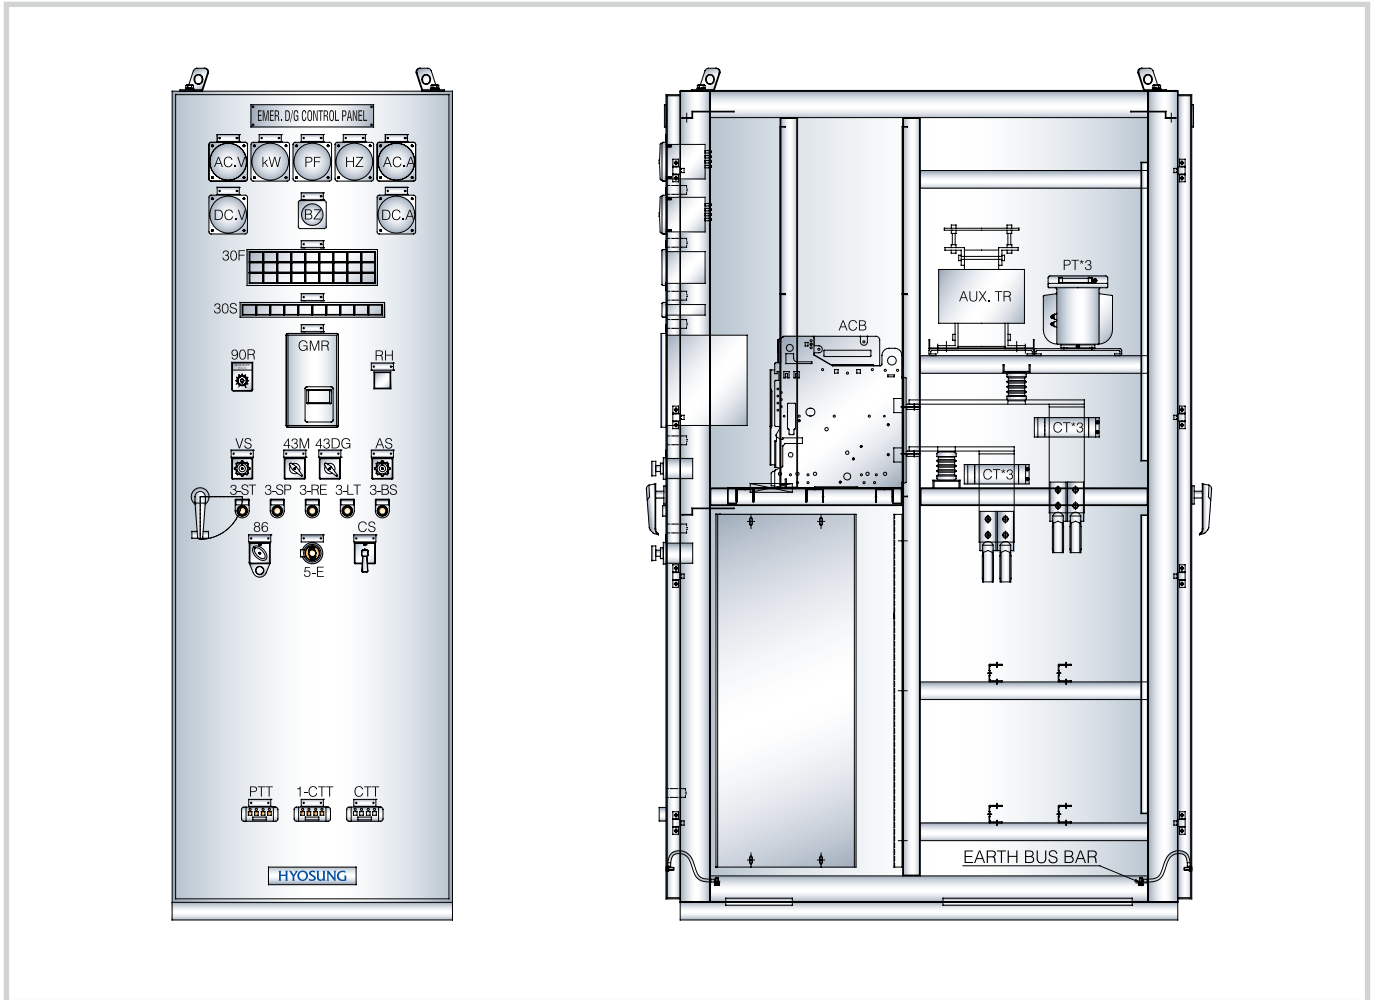


Control Power Source

Description	Voltage	Supplier
For Engine	DC 24V	Battery
For Sequence	DC 24V	Battery
For Circuit Breaker	DC 110V*	Customer
For Battery Charger	AC 220V*	Customer
For Heater & Lighting	AC 220V*	Customer

Note) *It can be changed as customer's requirement.

Control Panel Single Line Diagram

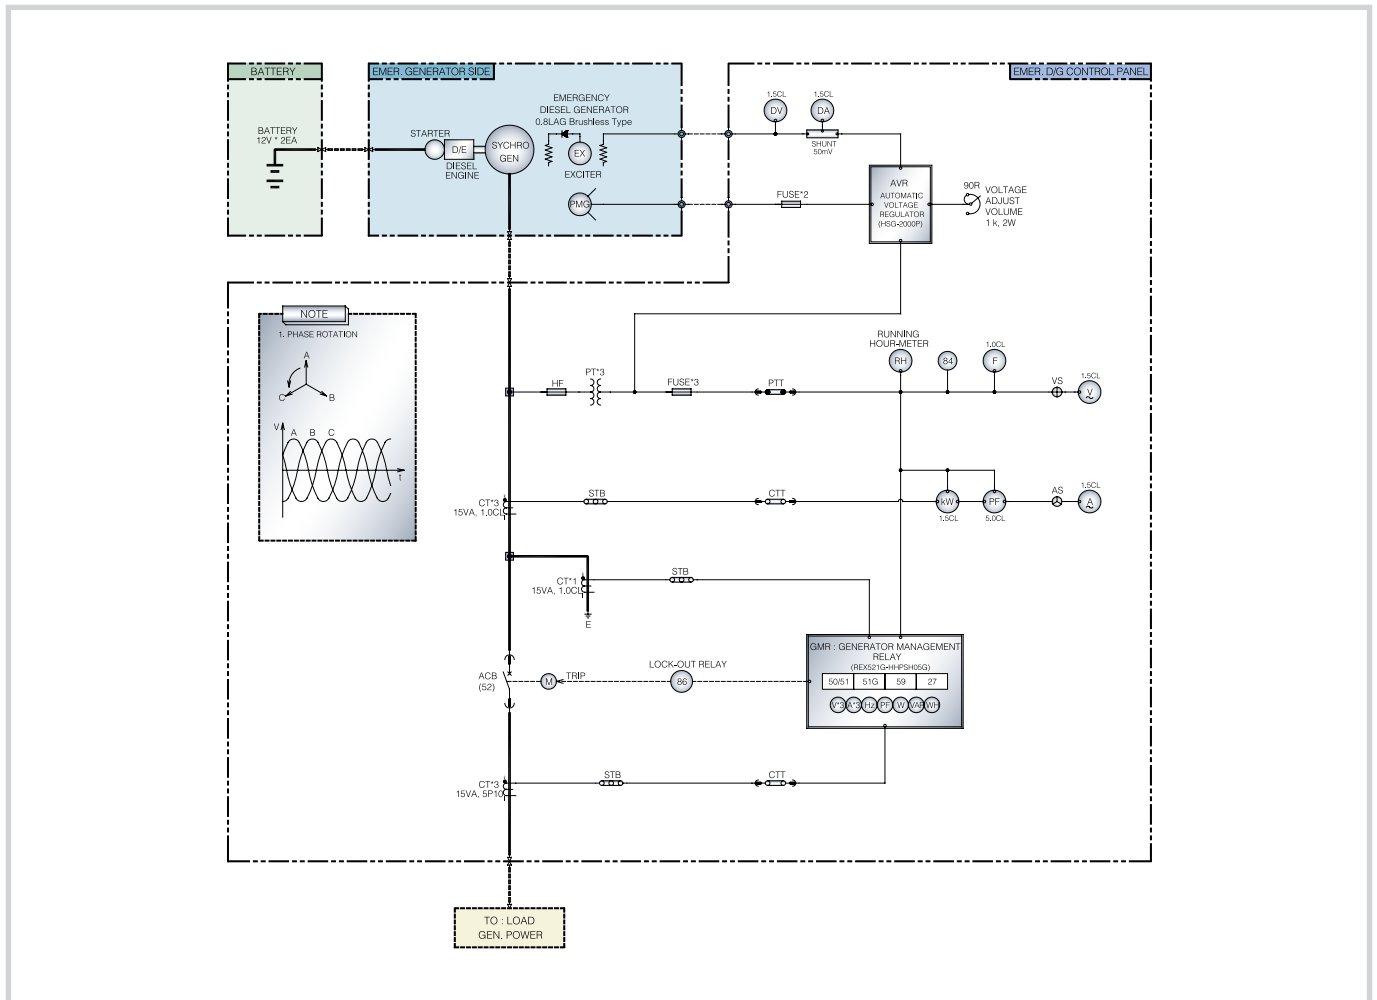

Protection

Description	Symbol	Eng Stop	CB Trip	Buzzer	Lamp
Over Speed	12	○	○	○	○
Water Temp High	26W	○	○	○	○
Oil Press Low	63Q	○	○	○	○
Starting Failure	48	○	○	○	○
Over Voltage	59	○	○	○	○
Under Voltage	27	×	○	○	○
Over Current	50/51	×	○	○	○
Ground Fault	51G	×	○	○	○

Note) It can be changed as customer's requirement.

MG Set



Characteristic

MG SET of Hyosung is manufactured variable type, supplying source of power according to required specification. With superior ability of design both motor and generator, it is possible that we design related products to varieties of the standard.

Application

MG SET applies electric power supply device of CRDM (Control Rod Drive mechanism) at nuclear power plants. In industry, it applies to electric power supply and regeneration device at particular test equipments.

MOTOR-GENERATOR SET

Motor-Generator Sets

Characteristic

- Variable voltage and frequency
- Uninterruptible power source by inertia effect
- Supply power source for test equipment
- Parallel operation system

Use

- Power source equipment for 50Hz
- Test equipment for electric power machinery
- Uninterruptible power source equipment

Output Range


- **Output** : 300kW ~ 10,000kW
- **Voltage** : 220V ~ 13,200V
- **Pole** : 4P ~ 12P

Type of Driver

- Induction Motor
- Synchronous Motor
- DC Motor



200kW MG Set for nuclear power plant

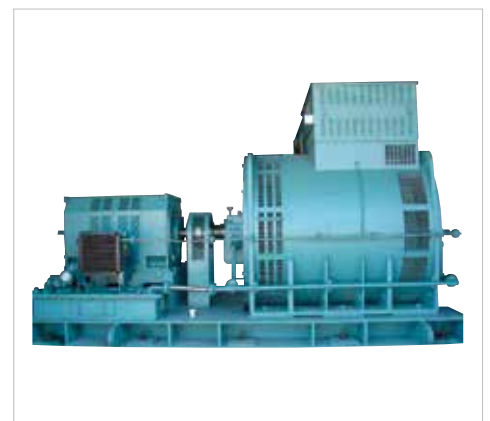


10MVA MG Set for test equipment of electric power machinery


Hyosung Motor is

Hyosung Motor is specialized motor maker that is possible to design Class 1E equipment, ensuring reliability and stability in severe environment.

Hyosung Motor applies variable field that is nuclear power plants, ship driving and the defense industry. It is capable of manufacturing optimized design according to special specification.

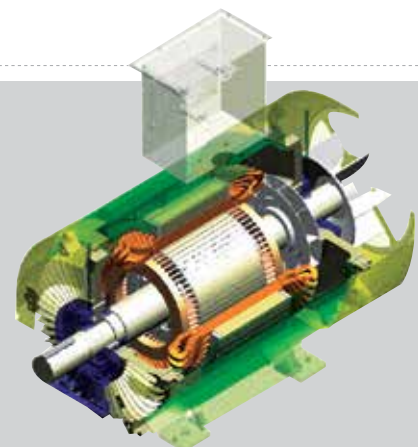

Wind Turbine Generator

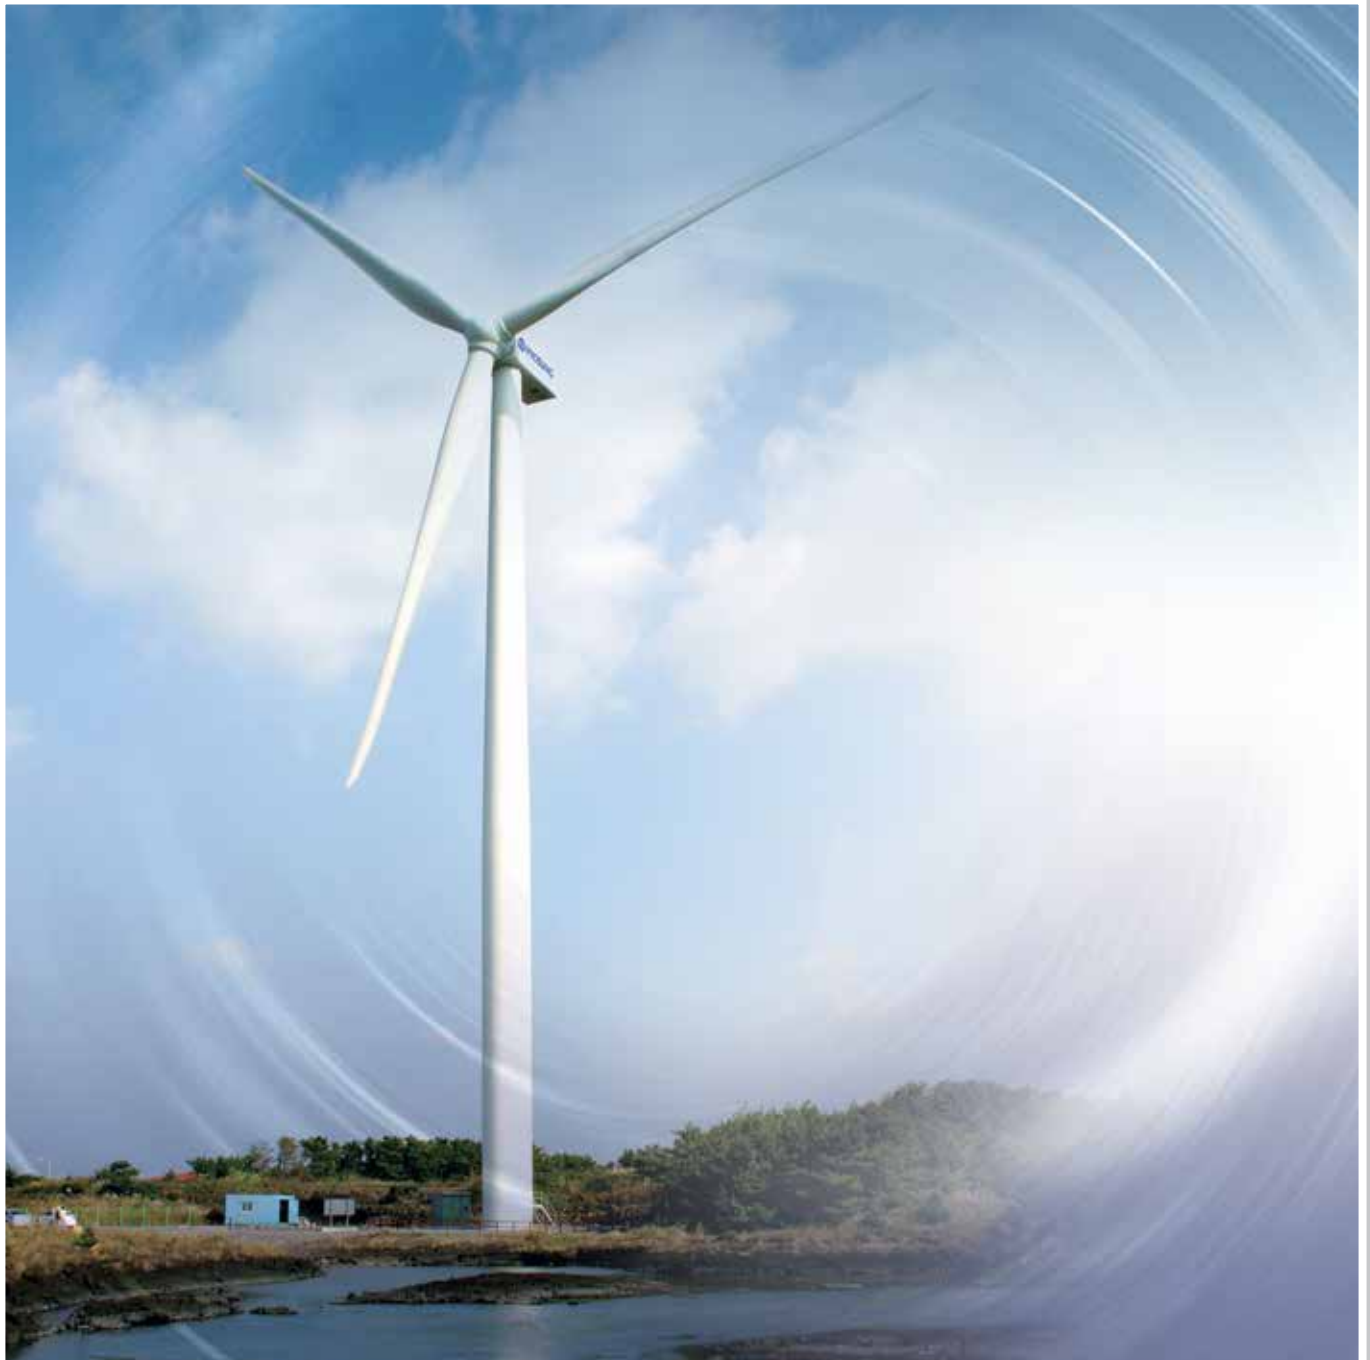

General


To provide optimum solutions for wind power generation systems, Hyosung manufactures and supplies various wind turbine power generators.

Characteristic

Hyosung's wind turbine generators are designed to last and function reliably on every engineering aspects :
Mechanical, reliability, magnetic flux optimization and electrical efficiency.


WIND TURBINE GENERATOR

Technology

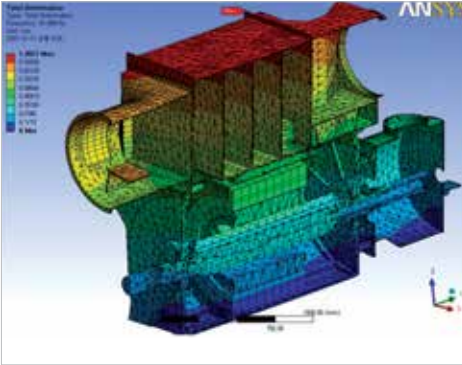


Structure Analysis


R&D department is composed of highly qualified staff, equipped with the latest IT resources. The generator development process involves the use of finite element and mechanical simulation software, Electromagnetic flow, fluid dynamics, etc.




Electromagnetic Analysis




Temperature Rising Analysis




Insulation & Winding Design

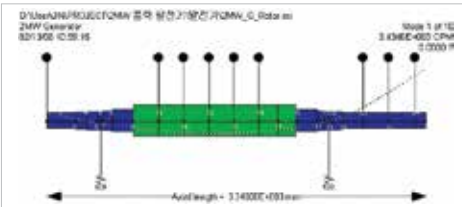


Natural Frequency Analysis



Current THD Calculation



Electromagnetic Field Analysis



Thermal and Flow Analysis

Features

- Realizing cost effectiveness by compact design
- Stable voltage output
- Less vibration and completely controlled noise level
- Easy maintenance
- Lifetime : 170,000hr (20 years)
- Certified by IEC, IEEE, NEMA , DEWI OCC, CSA...



Pictures



Wind Turbine Generator

Specification

DFIG (Doubly Fed Induction Generator)

Model		750kW	2MW
Specification			
Mechanical	Type	▶3-Phase Doubly Fed Induction Generator	▶3-Phase Doubly Fed Induction Generator
	Frame Size	400 Fr	500 Fr
	Cooling Type	IC 411	IC 616, IC 666
	Bearing Rating Life	175,000 hr	175,000 hr
	Protection	IP54	IP54
Electrical	Rated Power	Overall System Generator : 750 kW - Stator : 690 kW - Rotor : 60 kW	Overall System Generator : 2,000 kW - Stator : 1,810 kW - Rotor : 190 kW
	Voltage	690 V	690 V
	Winding Connection	Star	Star
	Frequency	50Hz, 60Hz	50Hz, 60Hz
	Insulation Class	Stator : F Rotor : F	Stator : F Rotor : F
	Revolution Speed	Synchronous Speed : 1,800 rpm Rated Speed : 1,980 rpm Speed Range : 1,350 ~ 2,250 rpm	Synchronous Speed : 1,800 rpm Rated Speed : 1,980 rpm Speed Range : 1,350 ~ 2,250 rpm
Ambient Temp.	- 20 ~ 40 °C	- 20 ~ 40 °C	

EESG (Electrically Excited Synchronous Generator)

Model		2MW
Specification		
Mechanical	Type	▶3-Phase Electrically Excited Synchronous Generator
	Frame Size	500 Fr
	Cooling Type	IC 616
	Bearing Rating Life	175,000 hr
	Protection	IP54
Electrical	Rated Power	2MW
	Voltage	4160 V
	Winding Connection	Star
	Frequency	50Hz, 60Hz
	Insulation Class	Stator : F Rotor : H
	Revolution Speed	Rated Speed : 1,800 rpm
Ambient Temp.	- 20 ~ 40 °C	

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

PMSG (Permanent Magnet Synchronous Generator)

Specification	Model	2MW
Mechanical	Type	▶3-Phase Permanent Magnet Synchronous Generator
	Frame Size	500 Fr
	Cooling Type	IC 666
	Bearing Rating Life	175,000 hr
	Protection	IP54
Electrical	Rated Power	2MW
	Voltage	690 V
	Winding Connection	Star
	Frequency	50Hz, 60Hz
	Insulation Class	Stator : F Rotor : F
	Revolution Speed	Rated Speed : 1,700 rpm
	Ambient Temp.	- 20 ~ 40 °C

* Above specification may change without notice and rating is based on ISO 8528, standard reference condition.

Our Offerings

Induction Generator

Hyosung offers various induction generators, such as the fixed speed and the variable speed types, for various types of wind turbines.

Synchronous Generator

Hyosung is an expert in synchronous and permanent magnet generators and offers a total solution including direct drive and middle and high drives.



www.hyosungpni.com

EASE TO CONTACT

HEAD OFFICE TEL : 82-2-707-6345~7 FAX : 82-2-707-6444
CHANGWON PLANT TEL : 82-55-279-7180~93 FAX : 82-55-268-9835