


PREMIUM

BISOL® Spectrum

Monocrystalline PV Modules With Coloured Glass

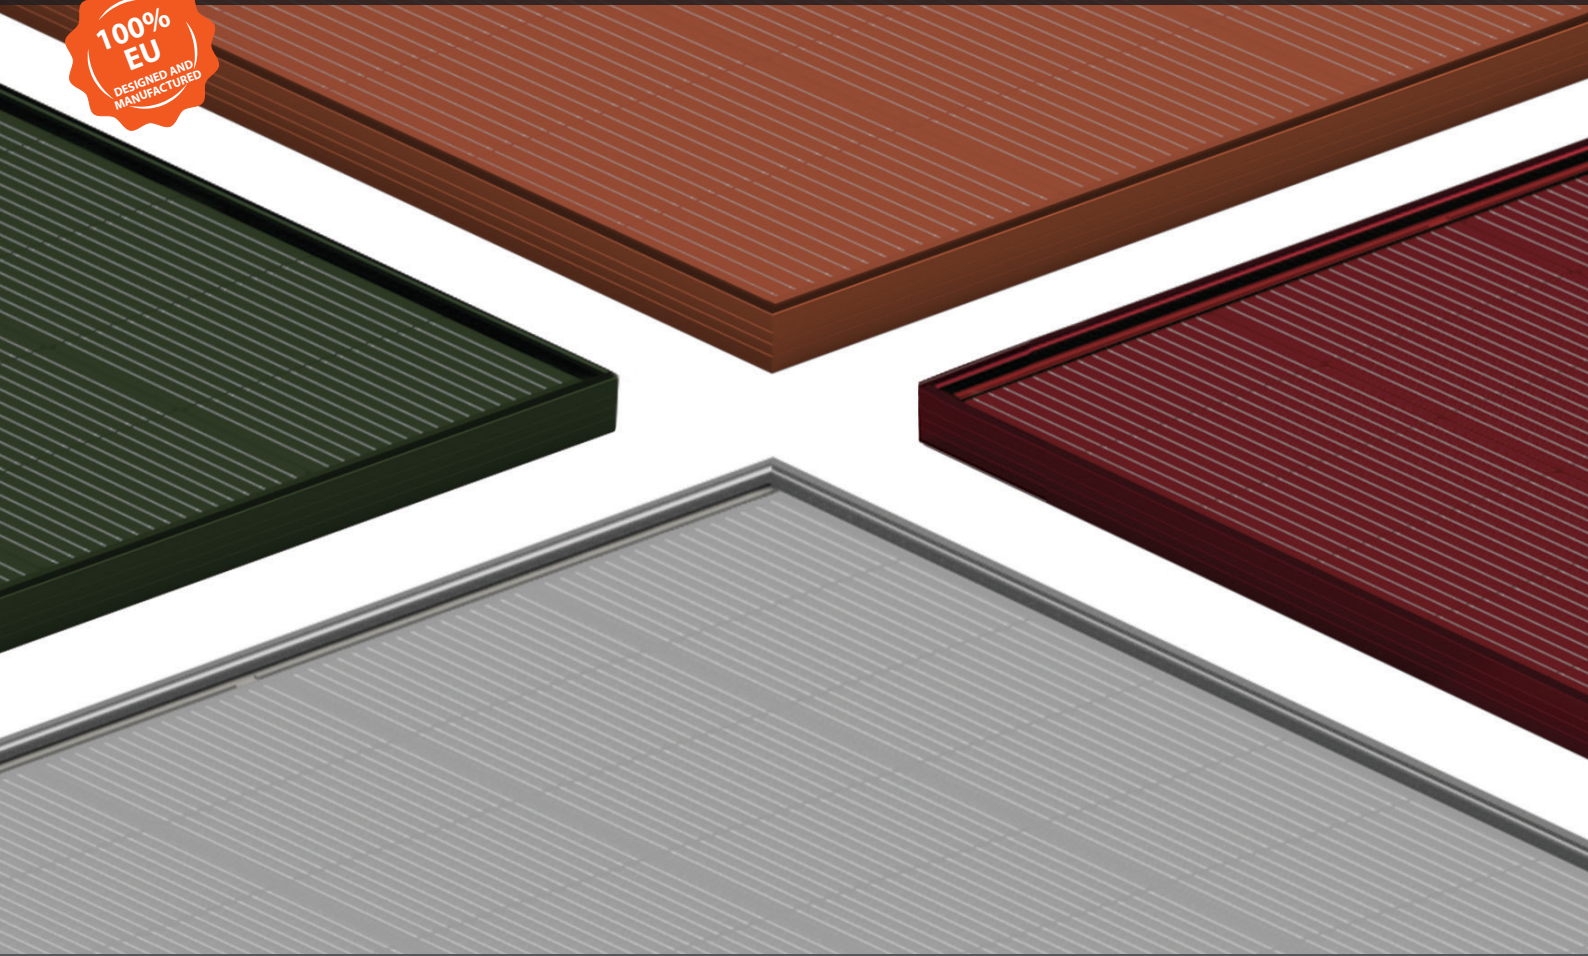

Made in Europe



30 years of
EU Guarantee



Hail and
Fire resistant



Uncompromisingly
certified



6,000 Pa Snow load



PID and
LETID free



Highest Efficiency




Module sorting
tehnology



Low maintenance
costs


Guarantee:

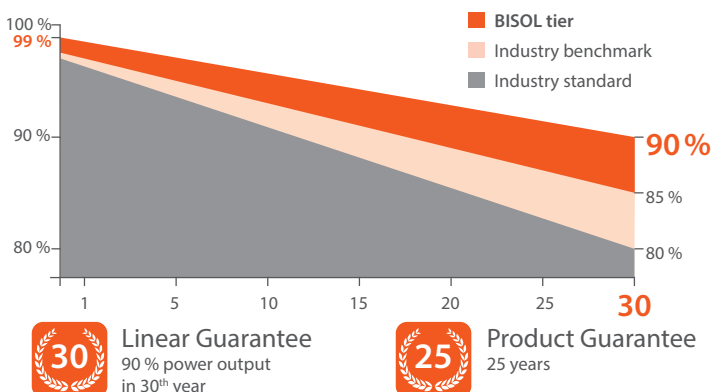


In compliance with:




I-V Curve at Various Irradiation Levels

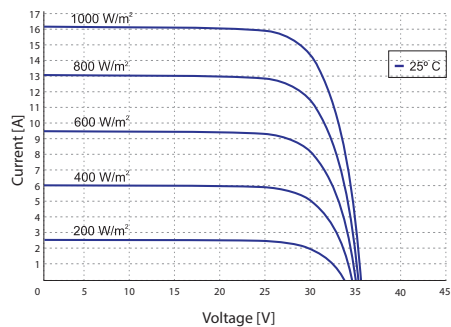


I-V Curve at Various Cell Temperatures

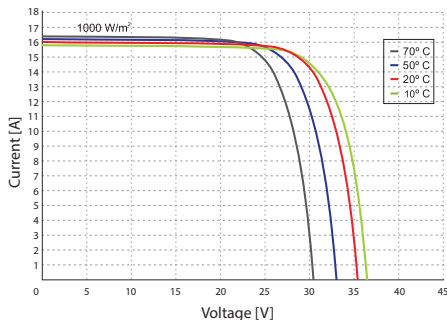


Dimensions

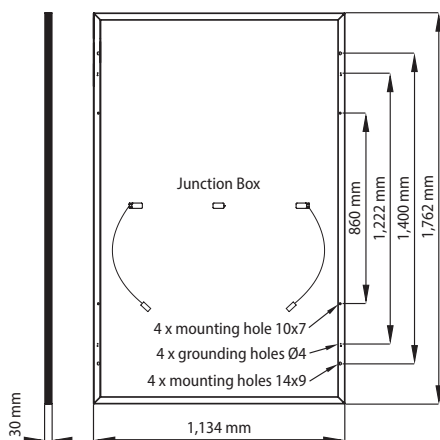

Frame Cross Section



Electrical Specifications @ STC (AM 1.5, 1,000 W/m², 25 °C):



Module Type	BDO	370	420	370	345
Nominal Power	P_{MPP} [W]	370	420	370	345
Short Circuit Current	I_{SC} [A]	13.9	16.1	13.9	12.9
Open Circuit Voltage	V_{OC} [V]	35.2	35.3	35.2	35.2
MPP Current	I_{MPP} [A]	13.2	15.1	13.2	12.2
MPP Voltage	V_{MPP} [V]	28.1	27.9	28.1	28.3
Module Efficiency	η_M [%]	18.5	21.0	18.5	17.3
Cell Efficiency	η_C [%]	20.2	22.9	20.2	18.8
Power Output Tolerance		$\pm 3\%$			
Maximum Reverse Current		30 A			
Maximum System Voltage		1,500 V			
Protection Class		Class II			

Efficiency at irradiation 200 W/m²: 99.3 % of STC efficiency or higher. | Tolerances for V_{OC} and I_{SC} and other electrical parameters are $\pm 3\%$.

The actual colour shades may vary from the images shown. Colour inconsistencies in a module may appear due to the nature of this product.

Electrical Specifications @ NOCT (800 W/m², 42 °C, AM 1.5, Wind 1m/s):

Module Type	BDO	370	420	370	345
Nominal Power	P_{MPP} [W]	284.0	323.0	284.0	265.0
Short Circuit Current	I_{SC} [A]	11.2	13.0	11.2	10.4
Open Circuit Voltage	V_{OC} [V]	33.7	33.8	33.7	33.7
MPP Current	I_{MPP} [A]	10.6	12.2	10.6	9.8
MPP Voltage	V_{MPP} [V]	26.8	26.5	26.8	27.1

Thermal Specifications:


Current Temperature Coefficient	α	+ 0.05 %/°C
Voltage Temperature Coefficient	β	- 0.25 %/°C
Power Temperature Coefficient	γ	- 0.29 %/°C
NOCT		42 °C $\pm$ 3 °C
Temperature Range		- 40 °C to + 85 °C

Mechanical Specifications:

Length x Width x Thickness	1,762 x 1,134 x 30 mm
Weight	21 kg
Solar Cells	96 Half-Cut c-Si / 182.25 x 105 mm
Junction Box / Connectors / IP	3 bypass diodes / MC4 compatible; On demand: MC4 EVO2 / IP 68
Cable Length	Default: 1,200 mm On demand (for portrait orientation): 300 mm
Frame	Anodized Al with mounting and drainage holes / rigid anchored corners.
Backsheet Colour	Black
Glass	3.2 mm AR coating tempered glass / high-transparency / low-iron content
Certified Test Load (Snow/Wind)	6,000 Pa / 2,400 Pa
Impact Resistance	Hailstone / Φ 40 mm / 99.1 km/h (61.6 mph)

Tolerances of values are $\pm 5\%$. Unspecified product properties remain under full discretion of BISOL Production.

Packaging Information:

				
Modules per Pallet	Packaging Dimension: Length/Width/Height	Stackable	Packaging Weight	Tot. Nr. of Pallets/Load
35	178 x 116 x 128 cm	3 pallets	759 kg	28