

Line: **ARCOAGRO 180 2in1**



ARCOAGRO 180 2in1

Number of furrows		4+1/ 5+	6+	7 (6+1)	8 (6+1+1)	9 (7+1+1)
	kg	2947	3170	3413	3676	3953
	hp	140 - 190	175 - 300	250 - 300	200 - 400	240 - 500
	protection	SHEAR BOLT				
	mm	1000				
	cm	35-41-47				
	mm	800 - 820				
	mm	180x180x10				


STANDARD EQUIPMENT:

- Mouldboard: KV09, LM35, LM40
- Trashboards
- Extension wings for LM35, LM40
- Fork hinge cat. 3
- Wheel FLOTATION 500/45-22,5
- Vacuum hydraulic accumulator
- Hydraulic front furrow adjustment + system On-land
- Box + 2 spanners
- In protection by BOLT - adjustment of angle of aggressivity of mouldboard

PROTECTION BY BOLT:



Main frame support wheel

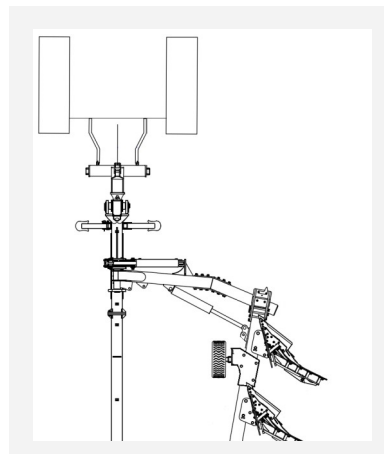

OPTIONAL EQUIPMENT:

- Mouldboard PS40
- Mouldboard KV28 - extra long
- Extension wing KV09
- Link ball and pin for tractor of cat.4
- Bolt skimmer type S /Skimmer Spring type S
- Bolt skimmer type K /Skimmer Spring type K
- Rolling coulter Ø 480 /Rolling coulter Spring Ø 480
- Sword landsides
- Front supporting wheels
- Main frame support wheel for plough 2in1