




Diesel Generator Set

MTU 4R0080 DS55

400 – 230 V/50 kVA/50 Hz/Prime Power
400 – 230 V/55 kVA/50 Hz/Standby Power
IVECO – F32 TM 1A



Optional equipment and finishing shown. Standard may vary.

Product highlights

Benefits

- Low fuel consumption
- Emissions optimizations available
- High availability and reliability
- Outstanding load acceptance
- Long maintenance intervals

Support

- Global product support offered

Standards

- Engine-generator set is designed and manufactured in facilities certified to standards ISO 2008:9001
- Generator set complies to ISO 8528 and fullfills performance level G2
- Generator meets BS5000; NEMA MG 1; ISO; DIN EN and IEC standards
- NFPA 110

Available emissions optimizations

- Exhaust emission EU 97/68 EC Stage II
- Fuel optimized

Wide Standard Scope of Supply

- 4P circuit breaker
- Island operation control panel
- Integrated fuel tank
- Industrial silencer (15 dB(A))
- Batteries & battery charger

Complete range of accessories available

- Sound attenuated enclosure
- Fuel system accessories
- Control panel & ATS
- Range of additional electrical options

Warranty

- Standard 36 months warranty after shipment



A Rolls-Royce
solution

Application data

Engine

Manufacturer	IVECO
Model	F32 TM 1A
Type	4-cycle
Arrangement	4-L
Displacement: L	3.2
Bore: mm	99
Stroke: mm	104
Compression ratio	17.1
Rated rpm	1500
Engine governor	mechanical
Gross power: kWm (prime/standby)	47.3/52
Air cleaner	Dry

Fuel system

Fuel tank capacity: OPU (EPU) in l	145 (130)
Autonomy: hr	14

Fuel consumption

At standby power rating:	l/hr	13.7
At 100% of power rating:	l/hr	12.6
At 50% of power rating:	l/hr	6.5

Liquid capacity

Total oil system: l	10.5
Total coolant capacity: l	19.27

Generator

Generator brand	Mecc-Alte
Generator type	HM200B1N
Insulation class	H-class
Bearing	single bearing
Enclosure	IP23 M
Voltage regulation	A.V.R. (electronic)
Exciting system	self-excited, brushless

Electrical

Electric system volts DC	12
Battery capacity: Ah	100

Air requirements¹⁾

Aspirating: m ³ /hr	183
Cooling air flow: m ³ /s	1.6

Exhaust system

Gas temp. (stack) ²⁾ : °C	548
Gas volume at stack temp. ³⁾ : kg/hr	248
Maximum allowable back pressure: kPa	5

Cooling/radiator system

Ambient capacity of radiator: OPU (EPU) in °C	50 (40)
Fan power consumption: kWm	0.5

Standard and optional features

System ratings (kW/kVA)

	MTU 4R0080 DS55	MTU 4R0080 DS55
	Prime operation	Standby operation
Voltage	400 V	400 V
Phase	Three phase	Three phase
Hz	50	50
kWel*	40.0	44.0
kVA**	50	55
Rated AMPS	72.2	79.4

* cos phi = 1.0

** cos phi = 0.8 Also available for following voltages 380V & 415V - for details please contact your local MTU dealer.

- 1 Technical data is for 100% power.
- 2 Technical data is for prime power.
- 3 Technical data is for standby power.

Standard and optional features

Engine

- 4- strokes diesel engine
- Flywheel housing SAE 3
- Flywheel 11 1/2"
- Oil pan
- Lube oil circulation pump
- Lube oil filter
- Dry exhaust manifolds
- Hot components and radiator guards
- Mobile components guards
- Electronic engine regulator

Fuel system

- Fuel filter with water-separator
- Direct fuel injection system
- Automatic fuel transfer pump
- Heavy-duty fuel pre-filter with water separator
- 3-way valve for fuel filling
- Integrated fuel tank (level sensor and drain cap incl.)

Generator

- 3-Phase, synchronos, brushless, self exciting, self regulating, self ventilating alternator
- IP23 M protection degree
- IP23 protection cover
- Winding temperature sensors
- Insulation class H
- Anti condensation

Control panel & Electric Options

- Control and power electric panel, with measurements devices and controller
- ATS (Automatic Transfer Switch)
- Control version for parallel operation
- Control version for synchronizing a single genset with mains
- Programmable timer for MM7 and MC7
- Remote display
- Expansion module for CAN communication
- Change over power supply for MC7
- Input Output/LED expansion modules for DeepSea controllers
- ModBus connection to customer systems TCP/IP
- Control version for synchronizing with mains without blackout
- Converter kits CAN to RS485/USB/LAN

Represents standard features

Represents optional features

Standard and optional features

Circuit breaker/power distribution

- 4 poles manual circuit breaker (motorized with DeepSea controllers)

Starting/Charging System

- 12V electric system
- Starting batteries installed
- Pre-heating resistance/jacket water heater
- Battery charging alternator
- Battery disconnecter
- Battery charger

Air Intake System

- Dry-type air filter
- Heavy duty air filter with automatic dust evacuation

Exhaust System

- Industrial silencer 15 dB(A)
- Residential silencer 35 dB(A)

Cooling System

- Coolant circulation pump
- Front type radiator for jacket water
- Engine mounted fan drive

Mounting System

- Mounted on steel base frame
- Resilient mounting of engine and generator

Enclosures


- Sound proof enclosure
- Socket box
- Increased fuel tank capacity

Documentation & Certifications

- Genset & component manuals
- Maintenance schedule
- CE-certification for EU
- Fluids and lubricants specification

- Represents standard features
- Represents optional features

Weights and dimensions

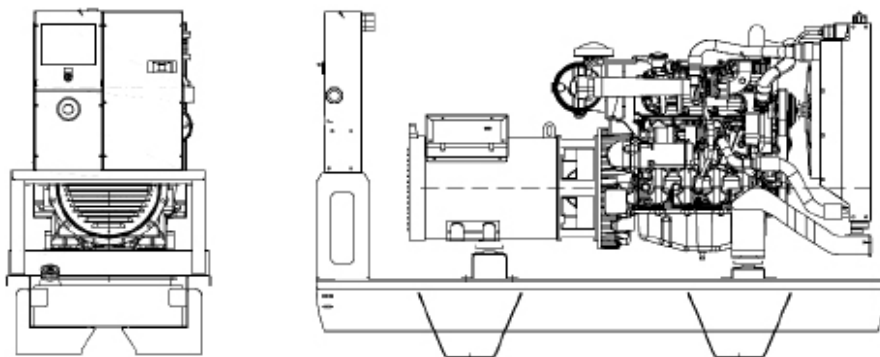

Drawing above for illustration purposes only, based on a standard open power 400 Volt engine-generator set. Lengths may vary with other voltages. Do not use for installation design. See website for unit specific template drawings.

System	Dimensions (L x W x H)	Weight (wet/with standard accessories)
Open Power Unit (OPU)	2150 x 780 x 1500 mm	868 kg
Enclosed Power Unit	2300 x 1050 x 1458 mm	1296 kg

Consult the factory for accurate weights and dimensions for your specific engine-generator set. Lengths may vary with other voltages. Do not use for installation design.

Sound data

Unit Type	
Open Power Unit: dB(A)	on request
Enclosed Power Unit: dB(A)	62

According to 2000/14/CE.

Sound data is provided at 7m for 75% prime power.

Rating definitions and conditions

- Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514, AS 2789 and DIN 6271. Average load factor: < 75%.
 - Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. No overload capability for this rating. Ratings are in accordance with ISO 8528-1, ISO 3046-1, BS 5514, AS 2789 and DIN 6271. Average load factor: < 85%, max. 500h/year.
 - Derating factor: Altitude: Consult your local MTU distributor for altitude derating.
Temperature: Consult your local MTU distributor for temperature derating.
- Rated power for reference conditions at 25°C and 100m above sea level.