

A large industrial steam turbine, the SST-200, is shown in a skid-mounted configuration. The turbine is painted in a light blue color and is mounted on a black metal base. It features a complex arrangement of pipes, valves, and a large cylindrical component. The turbine is positioned on a concrete floor against a white background. The Siemens logo and slogan are visible in the top left corner.

**SIEMENS**

*Ingenuity for life*

## SST-200

Economic and flexible steam turbine from 4 to 20 MW

[siemens.com/steamturbines](https://www.siemens.com/steamturbines)

The SST-200 is a single casing steam turbine provided in a packaged, skid-mounted configuration. It represents a solution based on long experience with both mechanical and generator drives and is characterized by ease of installation, facilitated by the modular package. The tailor-made, flexible steam turbine exactly fits to the customer needs.

# SST-200

## Economic and highly reliable

The Siemens SST-200 Siemens industrial steam turbine product line is based on the reaction blade technology.

The turbine series follows a modular product philosophy, ensuring a high level of performance and reliability.

The ability to combine standardized casing modules enable optimal design flexibility. This allows the turbine series to achieve high performance in combination with an optimal cost position.

Each steam path is customized for optimal fit to the specific thermal cycle requirements providing high efficiency over the entire operating range.

The inlet and exhaust sections are configured to cover different plant layout needs, and is available for both condensing and back pressure applications.

With this flexible approach the SST-200 series cover the range of both industrial power generation and mechanical drive applications.

The product design closely follows API 612 requirements.

## Typical applications



Sugar



Chemical



Biomass



Mechanical drive



Metals and mining




Energy from waste plants



## Benefits

- A high degree of standardization and lean specifications reduce the time to take the steam turbine in operation and provide easy maintenance. The combination of these factors lead Siemens to deliver a highly reliable products, with the short delivery times that suit this market segment.
- Implementation of the latest blading technology has led to efficiency improvements of up to 2% compared to previous turbine design
- Optimal total cost ownership due to standardized components, highest efficiency, and optimized maintenance concept

# Technical overview

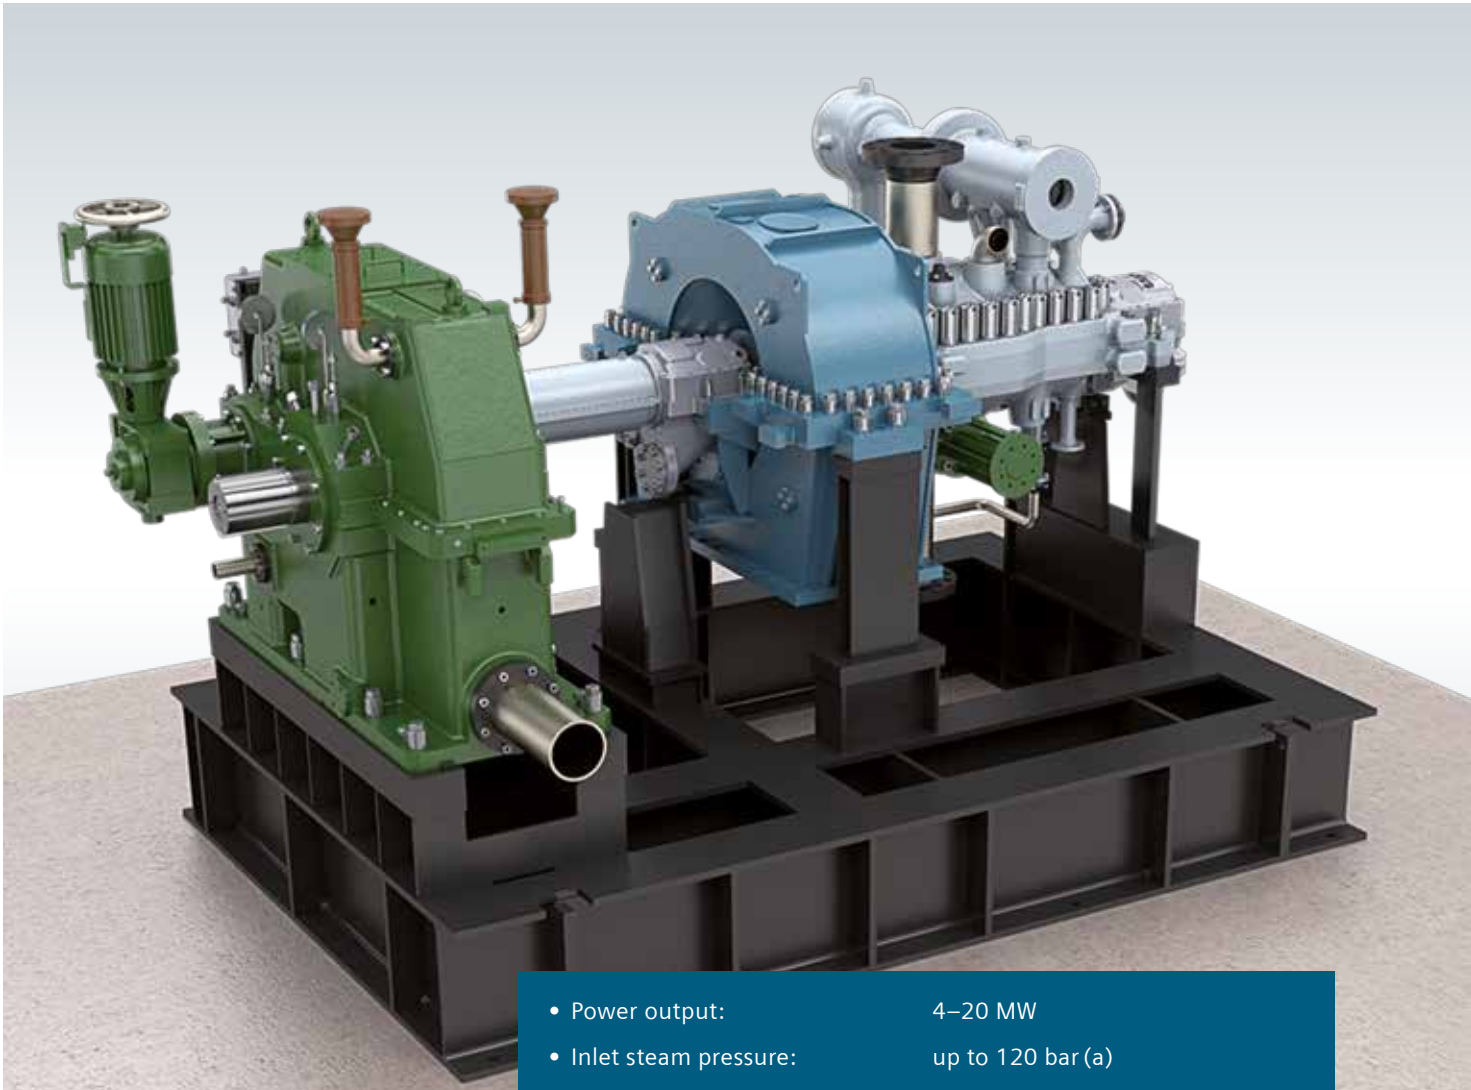

- Power output: 4–20 MW
  - Inlet steam pressure: up to 120 bar (a)
  - Inlet steam temperature: up to 540°C
- Exhaust conditions:
- Water-Cooled Condenser 0.05–0.15 bar (a)
  - Air-Cooled Condenser 0.15–0.50 bar (a)
  - Backpressure Turbines 2–20 bar (a)
  - Uncontrolled extraction up to 3
  - Controlled extraction 1

**Published by and copyright © 2017:**

Siemens AG  
Power and Gas  
Freyeslebenstr. 1  
91058 Erlangen, Germany

Siemens AG  
Power and Gas, Steam Turbines  
Lutherstraße 51  
02826 Goerlitz, Germany

**For more information, please contact  
our Customer Support Center:**

Phone +49/(0)180/524 70 00  
Fax +49/(0)180/524 24 71  
(Charges depending on provider)

E-mail: [support.energy@siemens.com](mailto:support.energy@siemens.com)

Article-No. PGSU-B10020-00-7600  
DA1217.500 BBI1117

Printed in Germany

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.